


Lenovo ThinkSystem ST50 V3 server 1.92 TB Tower Intel Xeon 6 6315P 2.8 GHz 16 GB DDR5-SDRAM 500 W

Gamintojas: **LENOVO** · Modelis: **7DF3A03EEA** · EAN: **5054444756059** · Prekės kodas: **717820**

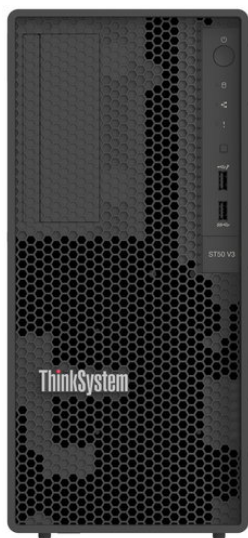

3 350,90 €

Kaina su PVM

Be PVM: **2 769,34 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

✓ Intel Xeon 6315P (12MB Cache, 2.8GHz)

✓ 16GB (4400MHz) DDR5-SDRAM (1 x 16) & 1920GB SDD



Aprašymas

The Lenovo ThinkSystem ST50 V3 is a value 1-socket tower server that also be rack mounted as a rack server. It is ideal for small-to-medium businesses, remote offices, branch offices, banking and public sector. The server supports the new Intel Xeon E-2400 Series processors, formerly codenamed "Raptor Lake".

This product guide provides essential presales information to understand the ThinkSystem ST50 V3 server, its key features and specifications, components and options, and configuration guidelines. This guide is intended for technical specialists, sales specialists, sales engineers, IT architects, and other IT professionals who want to learn more about the ST50 V3 and consider its use in IT solutions.

Techninė specifikacija

Specifications

Sandėlio grupė

Computers [+193][-2216]

Processor	
Processor family	Intel Xeon 6
Processor manufacturer	Intel
Processor model	6315P
Processor frequency	2.8 GHz
Processor boost frequency	4.7 GHz
Performance cores	4
Processor cores	4
Processor cache	12 MB
Motherboard chipset	Intel C266
Number of processors installed	1
Memory	
Internal memory	16 GB
Internal memory type	DDR5-SDRAM
Maximum internal memory	128 GB
Memory slots	4x DIMM
ECC	Yes
Memory clock speed	4400 MHz
Memory layout (slots x size)	1 x 16 GB
Storage	
Total storage capacity	1.92 TB
Optical drive type	No
Number of SSDs installed	2
SSD capacity	960 GB
Internal drive bays	3
Supported storage drive interfaces	Serial ATA
Graphics	
On-board graphics card	Yes
Maximum graphics card memory	16 MB
Network	
LAN controller	Broadcom BCM5720
Ethernet LAN	Yes
Cabling technology	10/100/1000Base-T(X)
Ethernet interface type	Gigabit Ethernet

Ports & interfaces

Ethernet LAN (RJ-45) ports	2
USB 2.0 ports quantity	2
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	5
VGA (D-Sub) ports quantity	1
Serial ports quantity	1

Design

Chassis type	Tower
Product colour	Black

Performance

Trusted Platform Module (TPM)	Yes
Trusted Platform Module (TPM) version	2

Software

Compatible operating systems	Microsoft Windows Server Red Hat Enterprise Linux SUSE Linux Enterprise Server VMware ESXi
------------------------------	--

Power

Power supply	500 W
Power supply input voltage	100 - 240 V
Power supply input frequency	50/60 Hz

Operational conditions

Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	8 - 90%
Operating altitude	0 - 3050 m

Certificates

80 PLUS certification	80 PLUS Platinum
-----------------------	------------------

Weight & dimensions

Width	170 mm
Depth	370 mm
Height	376 mm
Weight	12 kg

Technical details

Supported storage drives form factor (internal)	3.5"
---	------

Matmenys ir svoris

Matmenys (I × P × A)	43,00cm × 28,00cm × 55,00cm
----------------------	-----------------------------

Svoris

8,50kg