


Lindy DisplayPort 1.2 to VGA Active Converter

Gamintojas: **LINDY** · Modelis: **41006** · EAN: **4002888410069** · Prekės kodas: **718875**

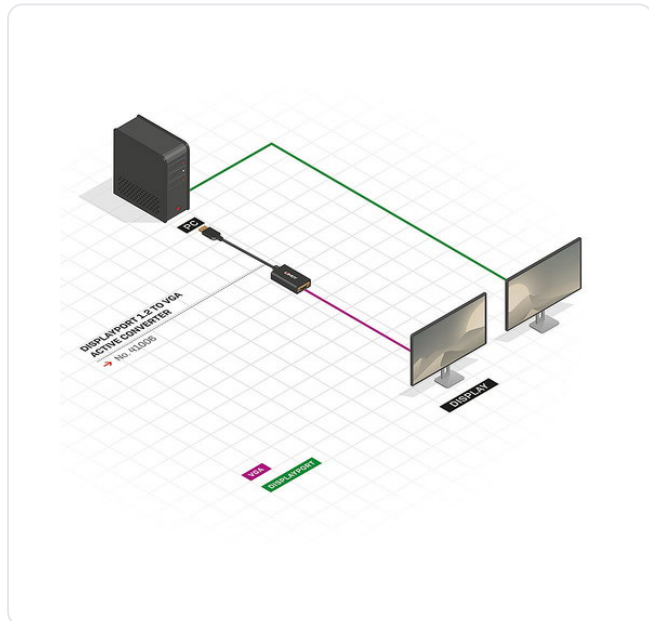

24,90 €

Kaina su PVM

Be PVM: **20,58 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Converts a DisplayPort signal into VGA andnbsp;
- ✓ Supports resolutions up to 1920x1080@60Hz
- ✓ Add a VGA monitor as a secondary display
- ✓ Quick and simple Plug and Play installation
- ✓ 2 year warranty

Aprašymas

The Lindy DisplayPort 1.2 to VGA Converter is ideal for connecting a DisplayPort equipped source such as a PC or laptop to a VGA monitor. It supports high definition video resolutions up to 1920x1080@60Hz. Active conversion ensures compatibility with various graphics cards including AMD Eyefinity, NVIDIA surround and Intel Collage.

The converter can also be used to add another display to extend the available desktop workspace and increase productivity. Internal copper shielding provides enhanced reliability and compatibility. The converter is also ideally suited for travelling due to its compact, lightweight form factor and convenient Plug and Play installation.

Techninė specifikacija

Specifications

Sandėlio grupė

I/O Cards & Adapters [+365][-122]

Features

Cable length

0.15 m

Connector 1

VGA (D-Sub)

Connector 2

DisplayPort

Connector 1 gender	Male
Connector 2 gender	Female
Connector 1 form factor	Straight
Connector 2 form factor	Straight
Connector contacts plating	Gold
DisplayPort version	1.2
Maximum resolution	1920 x 1080 pixels
Supported graphics resolutions	1920 x 1080 (HD 1080)
Data transfer rate	10.8 Gbit/s
Maximum refresh rate	60 Hz
Bend radius (min)	7 cm
Product colour	Black
Chipset	ANX9833
Jacket material	Polyvinyl chloride (PVC)
Connector housing material	Thermoplastic elastomer (TPE)
Plug and Play	Yes
Operational conditions	
Operating temperature (T-T)	-20 - 80 °C
Storage temperature (T-T)	-20 - 70 °C
Operating relative humidity (H-H)	20 - 90%
Certificates	
Certification	CE, UKCA, FCC, RoHS, REACH
Weight & dimensions	
Cable diameter	6.5 mm
Connector 1 dimensions (WxDxH)	38 x 61 x 17 mm
Connector 2 dimensions (WxDxH)	20 x 36 x 11 mm
Weight	45 g
Packaging data	
Package width	160 mm
Package depth	20 mm
Package height	160 mm
Package weight	49 g
Package type	Polybag
Packaging content	

Quantity per pack	1 pc(s)
-------------------	---------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------