


Seagate SkyHawk AI internal hard drive 16 TB 7200 RPM 512 MB 3.5" Serial ATA III

Gamintojas: **SEAGATE** · Modelis: **ST16000VE004** · EAN: **8719706436892** · Prekės kodas: **727266**

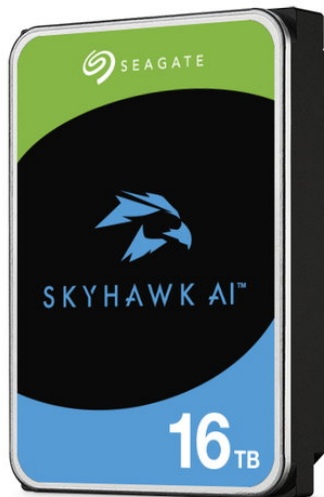

770,90 €

Kaina su PVM

Be PVM: **637,11 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 16 TB 3.5" 7200 RPM Serial ATA III
- ✓ Surveillance system HDD
- ✓ Storage drive buffer size: 512 MB
- ✓ 6 Gbit/s
- ✓ Uncorrectable Bit Error Rate (UBER): < 1 per 10¹⁵ bits read
- ✓ 680 g



Aprašymas

A video-optimised drive, SkyHawk AI is designed for NVRs with artificial intelligence for edge applications.

SkyHawk AI

Designed for AI video analytics, SkyHawk AI supports up to 64 HD cameras and 32 additional AI streams while offering capacities up to 20 TB. It delivers zero dropped frames with ImagePerfect AI and has enterprise-class workload rates at 550 TB/yr for high reliability.

SkyHawk

24x7 workloads can leverage up to 8 TB with drives designed for DVR and NVR systems. SkyHawk video drives are equipped with enhanced ImagePerfect™ and SkyHawk Health Management to help you sail through your toughest challenges.

Drive Health and Data Recovery

When integrated into compatible NVR systems, these drives provide overall system reliability increases due to SkyHawk Health Management (SHM).1

In addition, the SkyHawk drives include a robust three-year Rescue Data Recovery Services plan.

Techninė specifikacija

Specifications	
Sandėlio grupė	HDDs [+24] [-28]
Features	
HDD capacity	16 TB
HDD speed	7200 RPM
HDD size	3.5"
Interface	Serial ATA III
Type	HDD
Component for	Surveillance system
Storage drive buffer size	512 MB
HDD interface transfer rate	6 Gbit/s
HDD sustained transfer rate	260 MiB/s
Uncorrectable Bit Error Rate (UBER)	< 1 per 10 ¹⁵ bits read
Rotational Vibration (RV) sensors	Yes
Number of AI channels	32
Start/stop cycles	600000
Mean time between failures (MTBF)	2000000 h
Power	
Power consumption (typical)	7.72 W
Power consumption (standby)	1 W
Power consumption (idle)	3.5 W
Operating voltage	5 / 12 V
Start-up current	2 A
Operational conditions	
Operating temperature (T-T)	0 - 65 °C
Weight & dimensions	
Width	101.8 mm
Height	26.1 mm
Depth	147 mm

Weight	680 g
--------	-------

Logistics data

Products per pallet layer	8 pc(s)
---------------------------	---------

Harmonized System (HS) code	84717050
-----------------------------	----------

Master (outer) cases per pallet	40 pc(s)
---------------------------------	----------

Products per master (outer) case	20 pc(s)
----------------------------------	----------

Other features

Maximum number of cameras supported	64
-------------------------------------	----

Matmenys ir svoris

Matmenys (l × P × A)	15,00cm × 10,00cm × 3,00cm
----------------------	----------------------------

Svoris	0,69kg
--------	--------