

StarTech.com TB31PCIEX16 knyginių kompiuterių dokas / jungčių replikatorius Vielinis Thunderbolt 3 Juoda

Gamintojas: **STARTECH.COM** · Modelis: **TB31PCIEX16** · EAN: **065030868440** · Prekės kodas: **732499**



412,90 €

Kaina su PVM

Be PVM: **341,24 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ **THUNDERBOLT 3 PCIE EXPANSION CHASSIS:** Add PCI Express support to a Thunderbolt capable laptop/desktop computer; Increased productivity w/ Thunderbolt 3 and up to 40Gbps bandwidth; One PCIe x16 slot with a PCIe 3.0 x4 interface; Thunderbolt cable included
- ✓ **EXPANDABILITY FOR LAPTOPS:** Integrate video capture cards, high-speed fiber / ethernet connectivity, NVMe drives, FireWire cards, and more to unlock the potential of a notebook using this Thunderbolt 3 to PCIe chassis; Toolless design; Aluminum build
- ✓ **5K & 4K DISPLAY SUPPORT:** Connect a display through the external PCIe enclosure; The DisplayPort and TB3 ports support various video outputs up to 4K/5K 60Hz (other video resolutions are also supported); PCIe Box does not support GPU graphic cards
- ✓ **ROBUST POWER:** The chassis delivers 25W via the PCIe slot and the LP4 port on the other side of the unit supports up to 30W between the 12V and 5V rails.; 12V 5A (65W) universal power adapter is included and is compatible w/ NA/Jp, UK, EU, and ANZ regions
- ✓ **COMPATIBILITY:** Use single-width cards up to 8in (20.3cm) long; Built-in fan for active cooling; Daisy chain compatible with multiple Thunderbolt devices; The chassis is driverless and is compatible with macOS, Windows; TAA-compliant



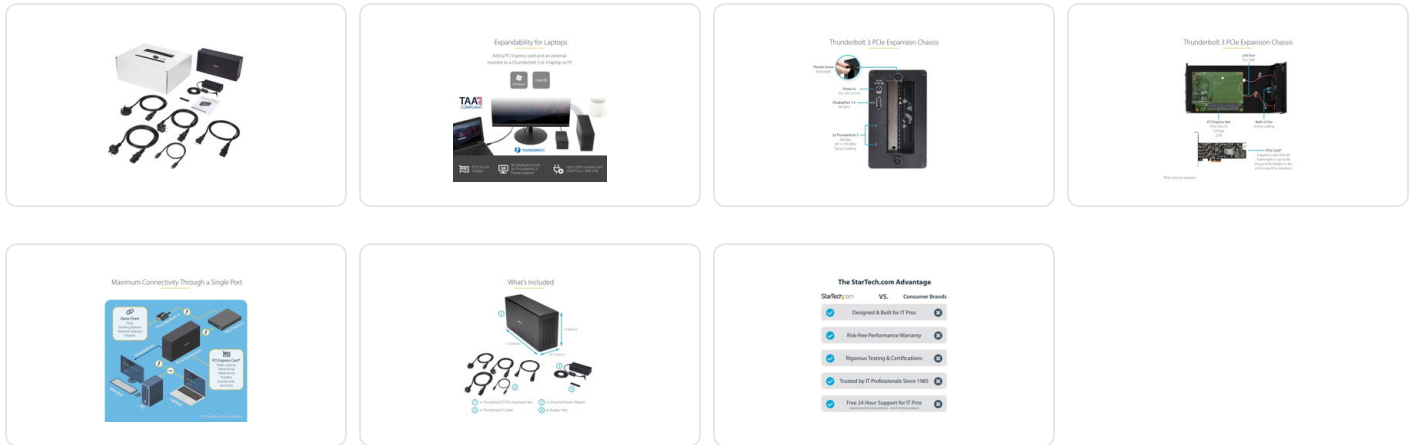

Aprašymas

Add an external PCIe (PCI Express 3.0) x16 slot and a DisplayPort connection to your Thunderbolt 3 equipped MacBook or laptop

This Thunderbolt™ 3 PCIe expansion chassis lets you add a PCI Express card to your laptop or desktop computer, through an external Thunderbolt 3 connection. The chassis also features a DisplayPort video output, so you can connect an additional monitor to your laptop, and supports Thunderbolt 3 daisy chaining, so you can expand your workstation even further.

Expand the capabilities of your Thunderbolt 3 computer

The Thunderbolt 3 PCIe chassis makes it easy to expand your system with the capabilities you need to work at peak productivity. You can add many types of PCI Express cards, such as a PCIe USB 3.1/3.0/2.0 and USB-C, SSD, network, eSATA, FireWire or video capture cards. And, with the speed and bandwidth support of Thunderbolt 3 and PCIe 3.0, you can enjoy many of the same port additions you would from the PCI Express expansion slots of a desktop system.

Extend your workstation

The external PCIe enclosure features a dedicated DisplayPort output that lets you add an additional display to your laptop or desktop computer. The enclosure features a second Thunderbolt 3 (USB-C) port, that you can use to connect a secondary display (a USB-C video adapter may be required). With multiple extended displays, you can work more efficiently by multitasking faster, and avoid the hassle of continually repositioning several open windows or programs.

You can also use the second Thunderbolt 3 port to connect additional Thunderbolt, USB and DisplayPort devices to your system. You can daisy chain up to six Thunderbolt 3 devices and expand your workstation to suit your specific requirements.

Increase productivity with faster speeds

Thunderbolt 3 is the fastest connection available, which means you don't have to deal with the performance bottlenecks of a slower connection, and can accomplish more in the same amount of time.

At up to 40Gbps this Thunderbolt 3 expansion chassis gives you the throughput to add displays to your laptop, access files quickly, and work without disruptions. It's easy to access and edit large uncompressed files such as videos and images on the fly, making it ideal for dynamic on-site production.

Techninė specifikacija

Ryšys

Ryšio technologija

Vielinis

Priimančioji sąsaja	Thunderbolt 3
USB 2.0 portų kiekis	0
HDMI portų kiekis	0
„DisplayPort“ kiekis	1
3 „Thunderbolt“ prievadų skaičius	2
DC įėjimo lizdas	Taip
Tinklas	
Ethernet LAN jungtis	Ne
Ethernet LAN (RJ-45) portų kiekis	0
Veikimo charakteristikos	
Produkto spalva	Juoda
Integruotas kortelių skaitytuvas	Ne
Duomenų perdavimo sparta	40 Gbit/s
LED indikatoriai	Energija
Guminės kojos	Taip
Korpuso medžiaga	Aliuminis, Plienas
Aušinimas	
Įmontuotas ventiliatorius	Taip
Ventiliatorių skaičius	1 ventiliatorius(iai / ių)
Ventiliatoriaus laikiklio tipas	Rankovinis guolis
Ventiliatoriaus skersmuo	6 cm
Garso lygis	24,55 dB
Didžiausias oro srautas	14,06 cfm
Energijos valdymas	
Maitinimo šaltinio tipas	DC
AC įėjimo įtampa	100 - 240 V
Įvesties srovė	2 A
Išėjimo įtampa	12 V
Išėjimo srovė	5,417 A
Energijos suvartojimas	65 W
Kištuko tipas	N tipas
Suderinamų energijos šaltinio kištukinių lizdų tipai	AU, EU, JP, UK, US
Belaidis įkrovimas	Ne
Programinė įranga	

Palaikomos „Windows“ operacinės sistemos

Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 11, Windows 11 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64

Mac suderinamumas

Taip

Palaikomos MAC operacinės sistemos

Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 11.0 Big Sur, Mac OS X 12.0 Monterey, Mac OS X 13.0 Ventura

Aplinkos sąlygos

Darbo temperatūros diapazonas (TT)

5 - 35 °C

Sandėliavimo temperatūros norma (T-T)

-20 - 50 °C

Darbo santykinės drėgmės diapazonas

20 - 80%

Svoris ir matmenys

Plotis

142 mm

Ilgis

280 mm

Aukštis

82 mm

Svoris

1,6 kg

Pakuotės duomenys

Pakuotės plotis

471 mm

Pakuotės gylis

239 mm

Pakuotės aukštis

94 mm

Paketo svoris

3,1 kg

Pakuotės turinys

Pridėti kabeliai

Thunderbolt

Kintamosios srovės adapteris

Taip

Greitos pradžios vadovas

Taip

Techninė informacija

Atitikties sertifikatai

CE, RoHS

Logistikos duomenys

Gaminių skaičius pagrindinėje (išorinėje) dėžėje

3 vnt

Pagrindinės (išorinės) dėžės plotis

467 mm

Pagrindinės (išorinės) dėžės ilgis	384 mm
Pagrindinės (išorinės) dėžės aukštis	331 mm
Darniosios sistemos (DS) kodas	84733020

Kitos savybės

Kabelio ilgis	0,5 m
Lustų rinkinys	Intel - Alpine Ridge DSL6540
Didžiausias porto pralaidums	3.94 GB/s

Tvarumas

Tvarumo reikalavimų laikymasis	Taip
--------------------------------	------

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)
- › [Vaizdo įrašas](#) youtube.com/watch?v=RwR6cfRG5J0

Gamintojo ir saugos informacija

GAMINTOJAS

StarTech.com Ltd.

Artisans Crescent 45, N5V 5E9 Ontario, London,
CA
startech.com

ATSAKINGAS ASMUO ES

StarTech.com Limited

Laarderhoogtweg 25, 1101 EB Amsterdam, NL
startech.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt