


NETGEAR M4250-40G8XF-PoE++ Managed L2/L3 Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) 2U Black

Gamintojas: **NETGEAR** · Modelis: **GSM4248UX-100EUS** · EAN: **606449151763** · Prekės kodas: **741289**

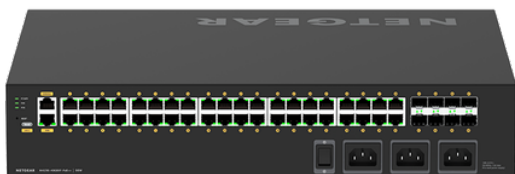

7 871,90 €

Kaina su PVM

Be PVM: **6 505,70 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Primary Port Speed : 1 Gigabit
- ✓ PoE Ports / Budget : 40 PoE++ (90W/port), 2,880W Budget
- ✓ Number of Ports : 48 (40x 1G PoE++, 8x SFP+)

Aprašymas

Pre-configured for out-of-the-box use

NETGEAR IGMP Plus™ enables instant multicast functionality for most AV over IP installations

Dedicated AV web-based GUI interface

Unique interface designed for the AV professional with color-coded, port-based profiles

Profiles for common audio protocols

Quickly assign profiles to ports for Dante, AES67, and AVB audio configurations. AVB Requires a separate license

Video profiles built-in

Special profiles for NVX, SVSI, Q-SYS and Dante video profiles can be easily assigned to ports as needed

Unique Automatic Configuration

Auto-trunk and auto-lag functionality automatically configures other M4250 switches for use in star topology.

Easier configuration with new AV GUI

The AV-oriented, web-based GUI permits factory or user-specified profiles to be assigned to individual ports as needed.

Use in noise-sensitive environments

Adjustable fans can be turned off if certain conditions are met. Even the default Quiet mode is quieter than most other switches.

Get up and running fast with little engineering time required

Our NETGEAR IGMP Plus™ feature is set from the factory to ensure out-of-the-box functionality for most AV over IP installations

Multiple mounting options provide ultimate flexibility

Threaded mounting holes sized to industry standards are built into the chassis for mounting behind a display or clamped to a truss.

M4250 AV Line Switches

An entirely new series of switches developed and engineered for the growing AV over IP market.

Techninė specifikacija

Management features	
Switch type	Managed
Switch layer	L2/L3
Ports & interfaces	
Basic switching RJ-45 Ethernet ports quantity	40
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
SFP+ module slots quantity	8
USB 2.0 ports quantity	1
Network	
Networking standards	IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt
10G support	Yes
Data transmission	
MAC address table	16000 entries
Switching capacity	240 Gbit/s
Throughput	178.56 Mpps
Latency (1 Gbps)	2.78 µs
Latency (10 Gbps)	0.73 µs
Jumbo frames support	Yes
Design	

Rack mounting	Yes
Form factor	2U
Product colour	Black
Performance	
Noise level	60 dB
Fanless	Yes
Power	
Power supply included	Yes
Power consumption (typical)	912 W
Power over Ethernet (PoE)	
Power over Ethernet (PoE)	Yes
Power over Ethernet (PoE) type supported	Active PoE
Power over Ethernet plus (PoE+) ports quantity	40
Total Power over Ethernet (PoE) budget	2880 W
Operational conditions	
Heat dissipation	3113.57 BTU/h
Weight & dimensions	
Width	440 mm
Depth	86.4 mm
Height	350 mm
Weight	10.3 kg
Packaging content	
Cables included	LAN (RJ-45), USB Type-C
User guide	Yes
Rack mount kit	Yes
Packaging data	
Rack rails	Yes
Logistics data	
Harmonized System (HS) code	85176990
Matmenys ir svoris	
Matmenys (I × P × A)	68,00cm × 60,00cm × 21,00cm
Svoris	15,44kg