


LevelOne 5-Port Gigabit Industrial Switch, DIN-Rail, -30°C to 65°C

Gamintojas: **LEVELONE** · Modelis: **IGP-0501** · EAN: **4015867196625** · Prekės kodas: **742027**

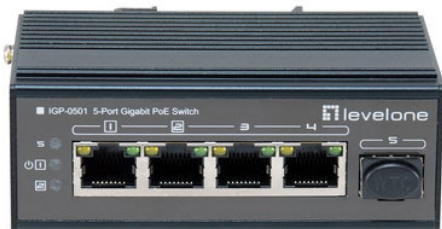

186,90 €

Kaina su PVM

Be PVM: **154,46 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 1000Mbps full-duplex, 10/100Mbps full/half-duplex, auto-negotiation, auto-MDI/MDIX
- ✓ Port 1 - 4 support IEEE 802.3at Power over Ethernet Plus (PoE+)
- ✓ Provides DIN-rail, wall or desktop mounting
- ✓ IP30 metal case
- ✓ 6KV surge protection level on each port
- ✓ ESD and surge protection



Aprašymas

LevelOne IGP-0501 Industry Ethernet Switch provides 4 PoE ports 10/100/1000Base plus 1 port Gigabit SFP to enable high speed network at mission-critical environment. With the industrial standard DIN-rail mount; this switch can be easily installed in the cabinet, plus the clearly visible status LEDs provide simple monitoring of port link activity. Moreover, the SFP slots support pluggable modules that enabling you to choose from a variety of transceivers. This switch is Power Sourcing Equipment (PSE), and it is fully complied with IEEE 802.3at PoE standard at maximum 30W power budget per port. It helps to save infrastructure wiring costs dramatically by eliminating electric wiring and less UPS needed. Also, it is compatible with IEEE802.3af standard PD devices.

Techninė specifikacija

Specifications

Sandėlio grupė > Netzwerk > Switches [+1607][-273]

Ports & interfaces

Basic switching RJ-45 Ethernet ports quantity	4
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Installed SFP modules quantity	0
Installed SFP+ modules quantity	0
Gigabit Ethernet (copper) ports quantity	4
SFP module slots quantity	1

Network

Networking standards	IEEE 802.3, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z
10G support	No
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T
Full duplex	Yes
Half duplex	Yes
Flow control support	Yes
Auto MDI/MDI-X	Yes
Auto-negotiation	Yes

Design

Rack mounting	No
Product colour	Black
Housing material	Metal
LED indicators	Activity, Power
International Protection (IP) code	IP30
Wall mountable	Yes
DIN rail mounting	Yes

Power

Power supply included	No
DC input voltage	48 - 57 V
Surge protection	Yes
Surge protection voltage	6 kV

Power over Ethernet (PoE)

Power over Ethernet (PoE)	Yes
Power over Ethernet (PoE) ports quantity	4
Power over Ethernet (PoE) power per port	30 W

Operational conditions

Operating temperature (T-T)	-30 - 65 °C
Storage temperature (T-T)	-40 - 85 °C
Operating relative humidity (H-H)	5 - 95%
Storage relative humidity (H-H)	10 - 90%

Weight & dimensions

Width	65 mm
Depth	36 mm
Height	101 mm
Weight	350 g

Packaging content

Quick start guide	Yes
-------------------	-----

Packaging data

Terminal block included	Yes
Package type	Box
Package width	70 mm
Package depth	60 mm
Package height	110 mm
Package weight	400 g

Technical details

Pallet gross length	80 cm
Pallet gross width	120 cm
Pallet height (air)	159 cm

Logistics data

Products per pallet	24 pc(s)
Country of origin	China
Master (outer) case width	422 mm
Master (outer) case length	566 mm
Master (outer) case height	360 mm
Harmonized System (HS) code	85176990
Master (outer) case gross weight	13 kg
Products per master (outer) case	28 pc(s)

Matmenys ir svoris

Svoris	0,10kg
--------	--------