


Lindy 1m USB 2.0 Type A to C Cable, Anthra Line

Gamintojas: **LINDY** · Modelis: **36886** · EAN: **4002888368865** · Prekės kodas: **744405**

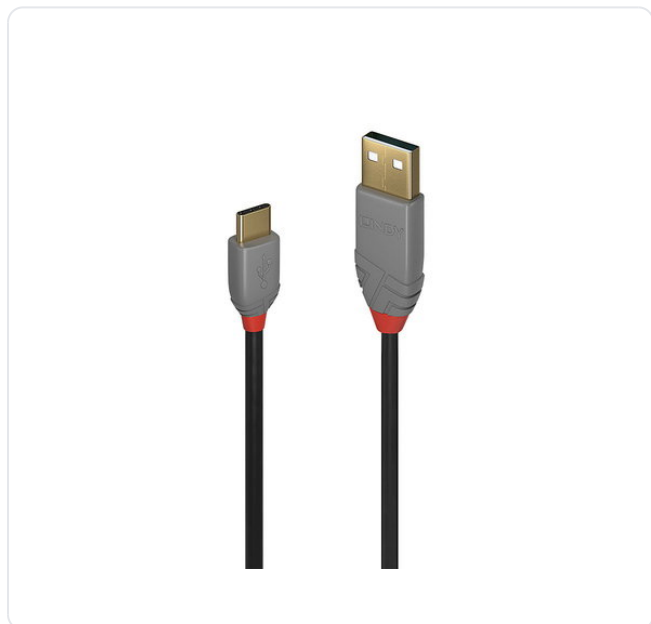

11,89 €

Kaina su PVM

Be PVM: **9,83 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Professional choice USB 2.0 Type A to C cable for commercial and high performance AV and IT installations
- ✓ Supports data transfer speeds up to 480Mbps
- ✓ Robust PVC housing, gold plated connectors and contacts
- ✓ Double shielded cable, corrosion resistant tinned copper conductors
- ✓ USB 2.0, 480Mbps; 10 year warranty



Aprašymas

From the Lines cable connectivity concept developed by Lindy, Anthra Line USB 2.0 Type A to C cables are the professional choice for high performance connections in commercial AV and IT installations.

USB Type C features a reversible connector, so no matter which orientation the cable is inserted, a connection will always be found. This connector allows a fully bi-directional cable with automatic host and device negotiation.

Anthra Line USB 2.0 cables are premium connections that feature double shielded construction with tinned copper conductors for performance and corrosion resistance. High quality gold plated contacts and connectors maintain signal integrity and reliability.

Data transfer speeds up to 480Mbps are supported for the quick and effortless transfer of large data volumes.

Anthra Line USB 2.0 Type A to C cables are available in lengths from 0.5m to 3m.

Techninė specifikacija

Specifications	
Sandėlio grupė	USB [+3386][[-35]
Features	
USB version	USB 2.0
Connector 1	USB A
Connector 2	USB C
Connector 1 gender	Male
Connector 2 gender	Male
Product colour	Black, Grey
Connector 1 form factor	Straight
Connector 2 form factor	Straight
AWG wire size	28
Connector material	Gold
Contact material	Phosphor bronze
Connector contacts plating	Gold
Cable jacket material	Polyvinyl chloride (PVC)
Conductor material	Tinned copper
Connector shielding	Yes
Connector shield material	Copper
Connector housing material	Polyvinyl chloride (PVC)
Maximum data transfer rate	480 Mbit/s
Maximum data transfer rate	0.48 Gbit/s
Cable type	Round cable
Plug and Play	Yes
Nominal attenuation	0.5-3m: 0.5Mhz €" 400Mhz 5.8db
Weight & dimensions	
Cable length	1 m
Cable diameter	3.5 mm
Bend radius (min)	3.5 cm
Connector 1 dimensions (WxDxH)	11 x 25.5 x 7.3 mm
Connector 2 dimensions (WxDxH)	15.5 x 35.1 x 7.8 mm
Packaging data	

Package type	Polybag
--------------	---------

Packaging content

Quantity per pack	1 pc(s)
-------------------	---------

Operational conditions

Operating temperature (T-T)	-20 - 80 °C
-----------------------------	-------------

Storage temperature (T-T)	-25 - 85 °C
---------------------------	-------------

Certificates

Certification	RoHS, REACH, UL
---------------	-----------------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------