


TP-Link EAP603GP-Desktop 1775 Mbit/s White

Gamintojas: **TP-LINK** · Modelis: **EAP603GP-DESKTOP** · EAN: **1210002605946** · Prekės kodas: **757247**

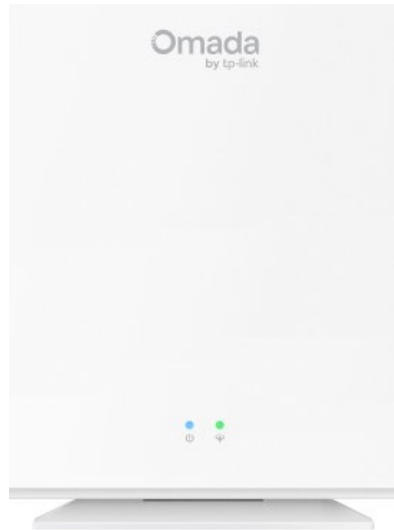

180,90 €

Kaina su PVM

Be PVM: **149,50 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Seamless 1.8 Gbps WiFi 6 Speeds: 1201 Mbps on 5 GHz & 574 Mbps on 2.4 GHz
- ✓ Multiple Ports for More Devices: 1x GPON port for high-speed, long-range access and 4x Gigabit RJ45 ports provide high-speed connections to more devices
- ✓ One Fiber for Multiple Services: Wired, wireless, voice, data, and HD video services
- ✓ Easy Use: One-click pairing and automatic adoption
- ✓ High Flexibility: Supports both desktop and wall mounting setups
- ✓ Advanced Features: Unified management for Omada devices and OLT, PPSK, multiple portals Omada mesh, and seamless roaming



Techninė specifikacija

Specifications

Sandėlio grupė

Server, Storage & Network > Access Points/Routers [+1554][-541]

Features

2.4 GHz Yes

5 GHz Yes

6 GHz	No
Maximum data transfer rate	1775 Mbit/s
Maximum data transfer rate (2.4 GHz)	574 Mbit/s
Maximum data transfer rate (5 GHz)	1201 Mbit/s
Ethernet LAN data rates	10,100,1000 Mbit/s
Receiver sensitivity	2.4 GHz: 11g 6M -95dBm; 11ax HE40 MCS11 -63dBm 5 GHz: 11a 6M -96dBm; 11ax HE80 MCS11 -63dBm
Security	
Security algorithms	WPA-Enterprise, WPA-Personal, WPA2-Enterprise, WPA2-Personal, WPA3-Enterprise, WPA3-Personal
Service Set Identifier (SSID) features	Multiple SSIDs
Number of SSID supported	16
Management features	
Web-based management	Yes
Cloud-managed	Yes
Ports & interfaces	
Ethernet LAN (RJ-45) ports	4
Power	
Power over Ethernet (PoE)	No
DC voltage range	12 V
Input current	1.5 A
Power consumption (max)	15.5 W
Design	
Placement	Desk, Wall
Product colour	White
Antenna	
Antenna type	Internal
Antennas quantity	4
Antenna gain level (max)	5 dBi
Certificates	
Certification	CE, FCC, RoHS, IC
Weight & dimensions	
Width	175 mm
Depth	140 mm
Height	33 mm

Weight	437 g
--------	-------

Operational conditions

Operating relative humidity (H-H)	10 - 90%
-----------------------------------	----------

Operating temperature (T-T)	0 - 40 °C
-----------------------------	-----------

Storage temperature (T-T)	-40 - 70 °C
---------------------------	-------------

Storage relative humidity (H-H)	5 - 90%
---------------------------------	---------