


Philips Signage Solutions Q-Line Digital signage flat panel 165.1 cm (65") IPS 400 cd/m² 4K Ultra HD Black

Gamintojas: **PHILIPS** · Modelis: **65BDL3511Q/00** · EAN: **8712581778606** · Prekės kodas: **768674**

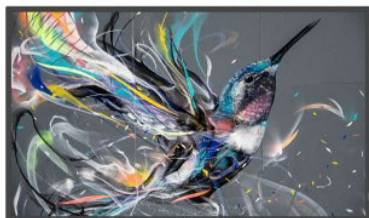

1 651,90 €

Kaina su PVM

Be PVM: **1 365,21 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Indoor Digital signage flat panel Black
- ✓ Ethernet LAN
- ✓ 165.1 cm (65") 3840 x 2160 pixels IPS 400 cd/m²
- ✓ Built-in speaker(s) 20 W
- ✓ Direct-LED 60 Hz 8 ms

Aprašymas

Inform and enthrall with a Philips Q-Line Professional Ultra HD Display. This reliable solution can be up and running as quickly as you need.

Operate, monitor and maintain with CMND and Control

Run your display network over a local (LAN) connection. CMND and Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

FailOver ensures that content is always playing

From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs, ensuring that content keeps playing even if the primary source goes down. Simply set a list of alternative inputs to be sure your business is always on.

Schedule what you want, when you want with SmartPlayer

Turn your USB into a true cost-effective digital signage device. Simply save your content (video, audio, pictures) on your USB and plug into your display. Create your playlist and schedule your content via the on-screen menu, and enjoy your own playlists anytime, anywhere.

Integrated media player. Easily schedule USB content

Easily schedule content to play from USB. Your Philips Professional Display will wake from standby to play the content you want, and then return to standby once playback has finished.

Techninė specifikacija

Display	
Display diagonal	165.1 cm (65")
Display technology	IPS
Display resolution	3840 x 2160 pixels
Display brightness	400 cd/m²
HD type	4K Ultra HD
Touchscreen	No
LED backlighting type	Direct-LED
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.372 x 0.372 mm
Display diagonal (metric)	163.9 cm
Native refresh rate	60 Hz
Haze rate	1%
Ports & interfaces	
HDMI ports quantity	3
DVI port	Yes
DisplayPorts quantity	0
USB port	Yes
HDMI version	2
HDMI input ports quantity	3
DVI-I ports quantity	1
USB ports quantity	2
USB version	2

Ethernet LAN (RJ-45) ports	1
RS-232C	Yes
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Orientation	Horizontal/Vertical
Panel mounting interface	400 x 400 mm
Performance	
Purpose	Universal
On Screen Display (OSD)	Yes
Number of OSD languages	12
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish
Mean time between failures (MTBF)	50000 h
Power	
Power consumption (typical)	165 W
Power consumption (standby)	0.5 W
Power consumption (max)	220 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	160 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G
Computer system	
Computer system	No
Built-in processor	No
Video formats supported	H.264, MPEG, WMV3
Audio formats supported	AAC, AAC HE, WMA
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Display width	1462.3 mm
Display depth	68.9 mm
Display height	837.3 mm
Display weight	27.8 kg

Packaging content

Remote control included	Yes
Batteries included	Yes
Cables included	AC, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%
Operating altitude	0 - 3000 m

Certificates

Certification	FCC, Class A CB BSMI VCCI CU ETL EMF PSB
---------------	--

Logistics data

Harmonized System (HS) code	85285210
-----------------------------	----------

Network

Ethernet LAN	Yes
Wi-Fi	No

Features


Wall mountable	Yes
----------------	-----

Technical details

Warranty period	3 year(s)
Compliance certificates	CE
Energy saving functions	Smart Power
Keyboard control	Hidden, Lockable
Signal loop through	RS232, IR Loop through
Product weight	27.8 kg (61.3 lbs)
Set depth (inch)	6.88 cm (2.71")
Set height (inch)	83.7 cm (33")
Set width (inch)	146.2 cm (57.6")

Tiled Matrix	Up to 10 x 15
Sustainability compliance	Yes
Other features	
Quick start guide	Yes
Network controllable	RS232/RJ-45
Screws included	Yes
Bezel width	1.49 cm
Remote control battery type	AAA

Energijos efektyvumas ir ekologinis projektavimas

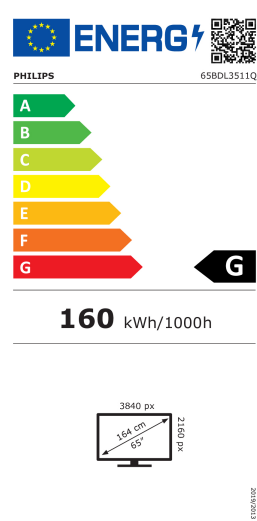

Energijos efektyvumo klasė **G** A-G

- > Energijos etiketė
- > Gaminio informacijos lapas
- > EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- > Naudojimo instrukcija
- > Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS
Philips Nederland B.V.
High Tech Campus 52, 5656 AG Eindhoven, NL
philips.nl

PLATINTOJAS
MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt