


APC Back-UPS nepertraukiamo maitinimo resursai (UPS) Budėjimo režimas (neprisijungus) 0,5 kVA 300 W 4 AC išvestis(ys / čių)

Gamintojas: **APC** · Modelis: **BK500EI** · EAN: **731304016359** · Prekės kodas: **837516**

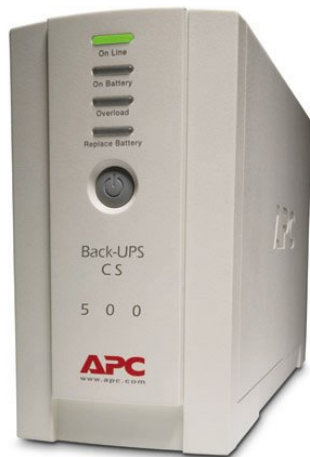

180,90 €

Kaina su PVM

Be PVM: **149,50 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Budėjimo režimas (neprisijungus)
- ✓ 0,5 kVA 300 W
- ✓ Signalų forma: Sinusas
- ✓ 4 AC išvestis(ys / čių)
- ✓ Rūgštinis akumuliatorius (VRLA) 12 V 7 Ah
- ✓ Tower Rusvai gelsvas



Aprašymas

This product is part of the Back-UPS range. The BK550EI features a total of 6 power outlets, 3 of which are UPS battery backup and 3 that are surge only. Its runtime at 100W is 24 minutes 20 seconds. It provides data line protection with a RJ45 analog phone line for phone or fax or modem or DSL. Its dimensions are 16.5 x 9.1 x 28.4 cm and 6.32kg. The BK550EI ensures office systems and their valuable data are protected from dangerous power surges, spikes and blackouts.

Techninė specifikacija

Features	
UPS topology	Standby (Offline)
Output power capacity	0.5 kVA
Output power	300 W
Waveform	Sine
Input operation voltage (min)	160 V
Input operation voltage (max)	300 V
Input frequency	50/60 Hz
Output frequency regulation	47 - 63 Hz
Surge energy rating	310 J
Hold time (min)	6 ms
Hold time (max)	10 ms
Efficiency	99%
Noise level	40 dB
Surge protection	Yes
Surge protection features	Digital Subscriber Line (DSL), Fax, Modem, Telephone
Power protection features	Overload
Audible alarm(s)	Yes
Audible alarm modes	Low battery alarm, Overload alarm
Ports & interfaces	
AC outlet types	C13 coupler
Power plug	C14 coupler
AC outlets quantity	4 AC outlet(s)
Number of output IEC jumpers	2
USB port	Yes
SmartSlot	No
SmartConnect port	No
Battery	
Battery technology	Sealed Lead Acid (VRLA)
Battery capacity	7 Ah
Battery capacity	83 VAh
Battery voltage	12 V
Typical backup time at full load	3.8 min

Typical backup time at half load	13.8 min
Battery life (max)	6 year(s)
Battery recharge time	8 h
Automatic battery test	Yes

Design

Form factor	Tower
Product colour	Beige
Cable length	1.83 m
LED indicators	Battery replacement

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m

Certificates

Compliance certificates	RoHS
Certification	C-tick, CE, EN 50091-1, EN 50091-2, GOST, VDE, REACH

Packaging content

Cables included	Phone (RJ-11), USB cable
Management card included	No
Quick installation guide	Yes

Sustainability

Sustainability certificates	ENERGY STAR, Green Premium
-----------------------------	----------------------------

Weight & dimensions

Width	91 mm
Depth	284 mm
Height	165 mm
Weight	6.32 kg

Packaging data

Warranty card	Yes
Software CD	Yes
Bundled software	PowerChute Serial Edition

Package width	241 mm
Package depth	368 mm
Package height	178 mm
Package weight	7.05 kg

Logistics data

Products per pallet	48 pc(s)
Harmonized System (HS) code	85078000
Products per master (outer) case	1 pc(s)

Other features

Nominal output voltage	230 V
Nominal input voltage	230 V
Filtering	Yes
Packaging content	Detachable 1.2m IEC power cord Detachable 1.8 m IEC power cord

Matmenys ir svoris

Matmenys (I × P × A)	42,00cm × 24,00cm × 19,00cm
Svoris	7,60kg

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

Schneider Electric SE

rue Joseph Monier 35, 92500 RUEIL MALMAISON, FR
[se.com](https://www.se.com)

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt