


D-Link DWM-311-G mobiliojo ryšio įrenginys

Gamintojas: **D-LINK** · Modelis: **DWM-311-G** · EAN: **790069469718** · Prekės kodas: **853010**

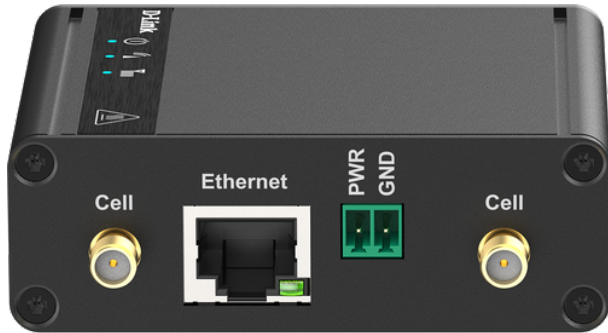

399,91 €

Kaina su PVM

Be PVM: **330,50 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt



Aprašymas

Enhance EV Charging with 5G Speed

The DWM-311-G 5G M2M Modem, with its ultra-fast 5G speeds and low latency, provides robust connectivity designed to streamline EV charging operations. It enables real-time monitoring of charging stations and enhancing the user experience. Featuring secure VPN protection, it ensures safe data transmission and remote access, protecting against external threats and simplifying maintenance to further drive cost-efficiency.

Plug & Play for Easy Installation

Simply insert a Micro-SIM card and power up; the DWM-311-G instantly connects your M2M devices to the high-speed 5G cellular network. This modem's rugged, compact design is perfect for any setting, including harsh environments. Designed for effortless, real-time remote access, it provides reliable long-distance connectivity ideal for various applications. It supports 4G/5G switching, making it stable connectivity and ideal where

quick setup and robust connectivity are crucial.

Robust Build Quality

The industrial-grade casing provides reliable high-speed connectivity in extreme conditions. The corrosion-resistant zinc-plated steel case with wide operating temperature range and humidity tolerance mean that the DWM-311-G is ready for the most demanding M2M applications in virtually any environment.

The DWM-311-G is also engineered to safely accept wide input voltage(VDC 5~32V) fluctuations, providing more flexibility and convenience when selecting a suitable power source, making your M2M installations significantly more reliable and much easier to deploy.

Techninė specifikacija

Konstrukcija	
Produkto spalva	Juoda
Ethernet LAN funkcijos	
Eterneto LAN duomenų perdavimo norma	10,100,1000,2500 Mbit/ai
DHCP serveris	Taip
Mobilusis ryšys	
Trumpųjų pranešimų paslauga (SMS)	Taip
Ryšys	
Ethernet LAN (RJ-45) portų kiekis	1
Saugumas	
Tinklo adresų transliavimas (NAT)	Taip
Portų ekspedijavimas	Taip
VPN palaikymas	OpenVPN
Veikimo charakteristikos	
Web pagrįstas valdymas	Taip
Aplinkos sąlygos	
Darbo temperatūros diapazonas (TT)	-30 - 70 °C
Sandėliavimo temperatūros norma (T-T)	-40 - 85 °C
Darbo santykinės drėgmės diapazonas	10 - 95%
Sandėliavimo santykinis drėgmės diapazonas	0 - 95%
Svoris ir matmenys	
Plotis	77,4 mm
Ilgis	68,5 mm
Aukštis	26 mm
Matmenys ir svoris	

Svoris

0,68kg

Dokumentai ir vaizdo įrašai

[› Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

D-Link

ATSAKINGAS ASMUO ES

D-Link Benelux

Postbus 48, 5480 AA Schijndel, NL

dlink.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt