
ASUS PRO B760M-CT-CSM Intel B760 LGA 1700 „micro ATX“

Gamintojas: **ASUS** · Modelis: **90MB1DY0-MVEAYC** · EAN: **4711387019610** · Prekės kodas: **861632**

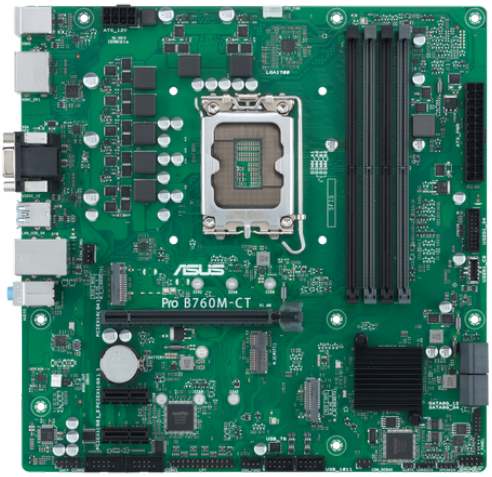

177,89 €

Kaina su PVM

Be PVM: **147,02 €**

Sandėlyje


Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Intel LGA 1700 „Intel® Celeron®“, Intel® Pentium® Gold, Intel® Core™ i3, Intel® Core™ i5, Intel® Core™ i7, Intel® Core™ i9
- ✓ PC „micro ATX“ Intel B760 7.1 kanalai
- ✓ DDR5-SDRAM 4 DIMM Maksimali vidinė atmintis: 128 GB
- ✓ HDD & SSD M.2, SATA III
- ✓ 128 Mbit CMOS jutiklio valymo mygtukas
- ✓ Gigabitinis eternetas





Aprašymas

ASUS Pro business motherboards provide enhanced features to smooth your IT operations, including comprehensive system protection, 24/7 stability and reliability and an improved management suite for easier customization. Known as the world's biggest and best-known motherboard brand, ASUS provides world-class after-sales service and guaranteed long-term availability to maximize your investment over the product life cycle and offers a high-quality, TCO-optimized solution for your business computing-needs.

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

ASUS Corporate Stable Model

ASUS Corporate Stable Model (CSM) is a commercial program designed to provide stable and reliable motherboards. Offering up to 36-month product lifecycle support and 6-month end-of-life notice to allow sufficient lead times for your organization to get ready for product transitions. Each purchase of an ASUS CSM motherboard comes with ASUS Control Center Express - server-grade IT management software.

ASUS Control Center Express

ASUS Control Center Express is a real-time IT monitoring and management tool designed for business that improves productivity and enhances security, helping prevent unauthorized access and data leaks. The intuitive dashboard enables easy, real-time hardware and software management across your organization. Purchase of a Pro motherboard entitles you to a copy of Control Center Express – a US$60

DDR5 Support

This business motherboard is a DDR5-compatible motherboard that optimizes memory module speeds and stability, while providing an advanced voltage delivery architecture for greater energy efficiency.

PCIe 4.0

This business motherboard is specially designed for 13th Gen Intel® Core™ processors and offer PCIe® 4.0 connectivity for storage devices and graphics cards. Wide bandwidth and superfast transmission speeds empower you to create feature-rich builds that deliver optimal performance wherever it’s needed.

Enhances system security from bottom to top
ASUS Boot Defender
ASUS Boot Defender on ASUS Business motherboards is designed to automatically protect, detect and recover the boot environment against any intrusions and attacks.

ASUS Self-recovering BIOS

ASUS-exclusive BIOS protection technology automatically recovers the system BIOS with a verified backup in the event of an update failure, preventing the need to replace or reinstall hardware.

Trusted Platform Module(TPM)

Hardware-based security offers better data protection, enhances network security, protects digital identities and ensures platform integrity.

NIST SP 800-193 Compliant

ASUS Business motherboard with ASUS Boot Defender adheres to the National Institute of Standards and Technology (NIST) Platform Firmware Resiliency guidelines to protect against potentially destructive attacks.

Certified NIST SP 800-147

ASUS Business motherboard is certified by the national computer security standards.

ASUS Secure Boot

ASUS business motherboard is set to check the firmware and signature of each piece of boot software.

ASUS Boot Defender

ASUS Boot Defender ensures your PC is secure even before you boot up the OS and offers additional protection beyond the OS environment. On start-up, it verifies the BIOS code to detect attacks or corrupted firmware. It’s designed to automatically protect and repair the compromised BIOS code to safeguard PCs from intrusions and attacks.

ASUS Self-recovering BIOS

With ASUS Self-recovering BIOS

The user simply needs to reboot the system and ASUS Self-recovering BIOS will restore the latest BIOS update.

ASUS RELIANT

Ensures consistent performance with the finest components and rigorous reliability testing

Anti-moisture Coating

Protection against moisture and corrosion

An innovative moisture-resistant coating protects the motherboard in humid environments, such as factories, libraries, data centers and internet cafes. It also minimizes internal corrosion by preventing adhesion and migration of moisture, prolonging the life of the motherboard.

ASUS MANAGEMENT SUITE

Make IT work more efficiency!

Event Log

A built-in event log enables easier troubleshooting by capturing useful system information

ASUS Commercial BIOS Kit

ASUS understands how important a customized product impacts users' mind share, experience the brand new Commercial BIOS Kit for partial BIOS update solution!

Remote IT Management

The onboard SMBUS header* connects to a DASH LAN card for remote IT management. DASH is a desktop and mobile architecture system hardware that allows the motherboard to be managed via the network.

* ASUS DASH LAN card sold separately. For more information, please contact your local ASUS sales representative.

ASUS SERVICEABILITY

Facilitate the assembly process and enable efficient troubleshooting

Q-LED Core

The Q-LED Core display produces light patterns by power LED during the Power-On Self-Test (POST) that can help users troubleshoot potential issues.

Techninė specifikacija

Procesorius	
Procesoriaus gamintojas	Intel
Procesoriaus lizdas	LGA 1700
Procesorių suderinamumas	„Intel® Celeron®“, Intel® Pentium® Gold, Intel® Core™ i3, Intel® Core™ i5, Intel® Core™ i7, Intel® Core™ i9
Palaikomi procesoriaus lizdai	LGA 1700
Atmintis	
Palaikomi atminties tipai	DDR5-SDRAM
Atminties angų skaičius	4

Maksimali vidinė atmintis	128 GB
Atminties angų tipas	DIMM
Atminties kanalai	Dviejų kanalų
ECC suderinamumas	Ne-ECC
Palaikomi atminties laikrodžio greičiai	4800,5000,5400,5600,5800,6000,6200 MHz
Palaikomas atmintinės taktinis dažnis (didžiausias)	6200 MHz
Nebuferizuota atmintis	Taip
Duomenų laikymo valdikliai	
Palaikomi saugojimo kaupiklių sąsajos	M.2, SATA III
Palaikomi saugojimo kaupiklių tipai	HDD & SSD
Grafika	
Paralelinio apdorojimo technologijos parama	Nepalaikomas
Vidinis I/O	
USB 2.0 jungtys	2
USB 3.2 (3.1 1 kart.) jungtys	2
USB 3.2 (3.1 2 kart.) jungtys	0
SATA III jungčių skaičius	4
SATA II jungčių skaičius	0
SATA jungčių skaičius	0
Garso jungtis	Taip
Priekinio skydelio audio jungtis	Taip
CPU fan jungtis	Taip
Šasi fenų jungčių skaičius	2
Šasi intruzijos jungtis	Taip
COM jungčių skaičius	3
Galinė panelė I/O jungtys	
USB 2.0 portų kiekis	2
USB 3.2 (3.1 1 kart.) A tipo prievadų skaičius	2
USB 3.2 (3.1 1 kart.) C tipo prievadų skaičius	0
USB 3.2 2 kart. (3.1 2 kart.) A tipo prievadų skaičius	0
USB 3.2 2 kart. (3.1 2 kart.) C tipo prievadų skaičius	0
Ethernet LAN (RJ-45) portų kiekis	1
VGA (D-Sub) portų kiekis	1
HDMI portų kiekis	1

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

DVI-D prievadų skaičius	0
PS/2 portų kiekis	2
HDMI versija	2.1
„DisplayPort“ kiekis	2
„DisplayPort“ versija	1.4
Ausinių išvestys	1
Mikrofonas, line-in jack	Taip

Tinklas

„Wi-Fi“	Ne
Ethernet LAN jungtis	Taip
Eterneto sąsajos tipas	Gigabitinis eternetas

Savybės

Taikoma	PC
Motininės plokštės formos faktorius	„micro ATX“
Motininės plokštės sisteminio valdiklio šeima	Intel
Pagrindinės plokštės lustas	Intel B760
Garso išvesties kanalai	7.1 kanalai
Produkto spalva	Žalia
Palaikomos „Windows“ operacinės sistemos	Windows 10 x64, Windows 11

Plėtotės lizdas

PCI „Express“ x1 (3.x kart.) angos	2
„PCI Express x16“ (4 kartos) lizdai	1
M.2 (M) angų skaičius	2

BIOS

BIOS atminties dydis	128 Mbit
CMOS jutiklio valymo mygtukas	Taip

Svoris ir matmenys

Plotis	244 mm
Ilgis	244 mm

Pakuotės turinys

Pridėti kabeliai	SATA

Kitos savybės

mSATA prievadų skaičius	0

Matmenys ir svoris

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Matmenys (I × P × A)	26,00cm × 27,00cm × 6,00cm
Svoris	0,98kg

Dokumentai ir vaizdo įrašai

› Naudojimo instrukcija

Gamintojo ir saugos informacija

GAMINTOJAS

ASUSTeK Computer Inc
Li-Te Road 15, 112 Taipei, TW
asus.com

ATSAKINGAS ASMUO ES

ASUS France S.A.R.L.
Allee bienvenue 10, 93160 Paris, FR
channel.asus.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt