


Viewsonic 86" 4K OS-Free Commercial Display

Gamintojas: **VIEWSONIC** · Modelis: **CDE86G3-1C** · EAN: **766907035681** · Prekės kodas: **867423**

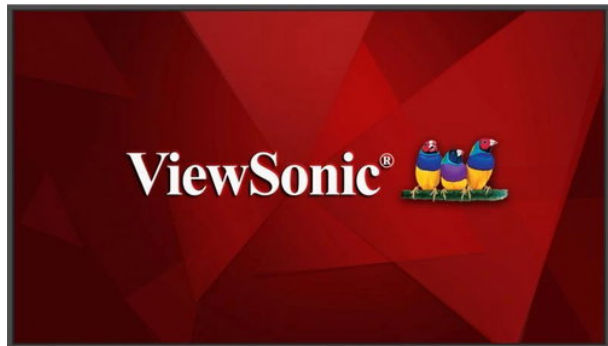

3 129,89 €

Kaina su PVM

Be PVM: **2 586,69 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ OS-Free Architecture minimizes vulnerabilities in secure and sensitive environments
- ✓ USB-C and HDMI 2.1 connectivity supports easy BYOD use without additional adapters
- ✓ Fast cold boot and 24/7 operation ensures instant power-on and nonstop performance
- ✓ Built-in USB media playback supports offline content delivery and digital signage
- ✓ ProAV system integration enables centralized control
- ✓ EPEAT® Gold certification supports sustainable, large-scale commercial deployments
- ✓ 500-nit brightness and 4K UHD resolution deliver vivid visuals in any orientation





Aprašymas

The ViewSonic CDEG3 Series is an OS-free commercial display designed for secure, round-the-clock operation in mission-critical environments across corporate, government, healthcare, and higher education sectors. By eliminating pre-installed apps and background services, it reduces software attack surface while supporting fast boot times and simplified IT management. With native 4K UHD resolution in both landscape and portrait orientation, 500-nit brightness, and built-in USB media playback, this secure signage solution ensures clear visibility for announcements and digital displays in high-traffic environments. It also features extended connectivity options including USB-C, HDMI 2.1, LAN, and RS-232, making it well-suited for BYOD meetings and video conferencing. To further streamline remote device management, the commercial-grade display integrates with leading ProAV control systems. Certified EPEAT® Gold, CDEG3 Series digital displays offer a low-maintenance, sustainable solution that balances security, performance, and operational efficiency for any mission-critical space.

Purpose-Built for Security-Sensitive Environments

The CDEG3 Series enhances security by adopting an OS-free architecture with no pre-installed apps, background services, or third-party systems. This design reduces software attack surface and simplifies long-term device management for corporate offices, government institutions, hospitals, and other sensitive environments.

Fast Cold Boot for Seamless Communication

With cold boot in under 8 seconds*, the CDEG3 Series eliminates delays at the start of meetings, presentations, and scheduled signage. This commercial-grade display ensures content appears exactly when it's needed, operating 24/7 in corporate, retail, and education environments where every second counts.*Cold boot under 8 seconds supported via HDMI 2 and 3 only.

Universal Connectivity for BYOD Setups

This presentation display supports BYOD in classrooms and meeting rooms with USB-C (DP1.2, HDCP) and HDMI 2.1 ports, allowing both guest and internal users to connect personal devices and share content securely without accessing the internal network.

Landscape and Portrait Orientation

Supporting both landscape and portrait modes, this commercial-grade display adapts to a wide range of installation needs, from digital menu boards to meeting room signage, and school displays.

Bright, Clear Images

With 4K UHD resolution and 500 nits of brightness, the CDEG3 Series delivers vivid, detailed images even in well-lit environments. Ideal for meeting rooms and public displays, it ensures content remains clear, engaging, and easy to read.

Built for a Lower Environmental Impact

Designed with sustainability in mind, the CDEG3 Series is the first large format display to earn EPEAT Gold certification. Combined with ENERGY STAR compliance, it offers businesses, schools, and institutions an energy-efficient solution that reduces environmental impact while maintaining high performance.


Techninė specifikacija

Display	
Display diagonal	2.18 m (86")
Display technology	LCD
Display resolution	3840 x 2160 pixels
Display brightness	500 cd/m²
HD type	4K Ultra HD
Touchscreen	No
Panel type	TFT
LED backlight	Yes
LED backlighting type	Direct-LED
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Active display area (W x H)	941.184 x 529.416 mm
Panel life	50000 h
Native refresh rate	60 Hz
Haze rate	25%
Surface hardness	3H
Ports & interfaces	
HDMI ports quantity	3
DVI port	No
DisplayPorts quantity	0
USB port	Yes
HDMI version	2.1
HDMI input ports quantity	3
VGA (D-Sub) input ports	1
DisplayPort version	1.2
USB ports quantity	3
USB version	2
USB connector type	USB Type-A, USB Type-C
USB Type-C DisplayPort Alternate Mode	Yes

Ethernet LAN (RJ-45) ports	1
PC Audio in	Yes
RS-232 interface	Yes
Digital audio optical out	1
PC Audio out	Yes
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Orientation	Horizontal/Vertical
Screen shape	Flat
Panel mounting interface	600 x 400 mm
Bezel width (bottom)	1.59 cm
Bezel width (side)	1.59 cm
Bezel width (top)	1.59 cm
Anti-glare screen	Yes
Performance	
Purpose	Commercial
Operating hours (hours/days)	24/7
HDCP	Yes
HDCP version	1.4/2.2
Power	
Power consumption (typical)	138.3 W
Energy efficiency class (SDR)	F
Energy efficiency class (HDR)	F
Energy consumption (SDR) per 1000 hours	220 kWh
Energy consumption (HDR) per 1000 hours	219 kWh
AC input voltage	100 - 240 V
Weight & dimensions	

Display width	1933.8 mm
Display depth	79.7 mm
Display height	1103.8 mm
Display weight	39.5 kg
Weight	42.8 kg
Packaging data	
Package width	2095 mm
Package depth	185 mm
Package height	1220 mm
Package weight	58.9 kg
Packaging content	
Remote control included	Yes
Batteries included	Yes
Cables included	AC, HDMI, RS-232
Mounting kit	Yes
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Logistics data	
Products per master (outer) case	1 pc(s)
Pallet gross length	114 cm
Pallet gross width	2.17 m
Pallet gross height	134 cm
Harmonized System (HS) code	8528521000
Network	
Ethernet LAN	Yes
Technical details	
Sustainability certificates	ENERGY STAR, EPEAT Gold, ErP
Compliance certificates	CB, CE, EAC, Federal Communications Commission (FCC), RCM, REACH, RoHS, WEEE, cTUVus
Matmenys ir svoris	
Svoris	42,80kg

Energijos efektyvumas ir ekologinis projektavimas

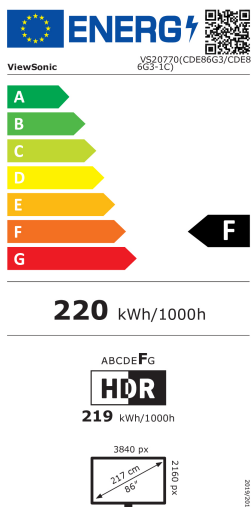

Energijos efektyvumo klasė

F A-G

- › [Energijos etiketė](#)
- › [Gaminio informacijos lapas](#)
- › [EPREL duomenų bazė](#)

Dokumentai ir vaizdo įrašai

- › [Greitos pradžios vadovas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

Viewsonic

ATSAKINGAS ASMUO ES

ViewSonic Technology GMBH

Fürst-Leopold-Platz 1, 46284 Dorsten, DE
viewsonic.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt