
StarTech.com PEXSAT34RH RAID valdiklis PCI Express 2.0 6 Gbit/s

Gamintojas: **STARTECH** · Modelis: **PEXSAT34RH** · EAN: **065030849951** · Prekės kodas: **890227**

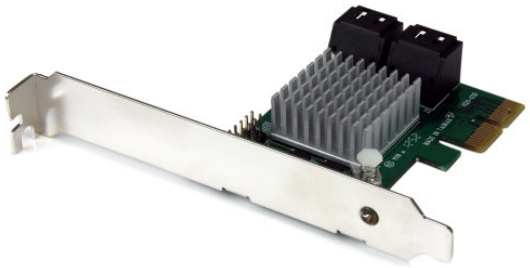

108,90 €

Kaina su PVM

Be PVM: **90,00 €**

Sandėlyje

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Palaikomi saugojimo kaupiklių sąsajos: SATA, „Serial ATA III“
- ✓ Priimančioji sąsaja: PCI Express
- ✓ RAID lygiai: 0, 1, 10, JBOD
- ✓ 6 Gbit/s
- ✓ SSD palaikymas






Aprašymas

Add 4 Internal SATA III (6Gbps) ports to a computer through a PCI Express x2 slot

The PEXSAT34RH 4-Port PCI Express 2.0 SATA Controller Card with HyperDuo adds 4 AHCI SATA III ports to a computer through a PCIe slot (x2), delivering multiple internal 6Gbps connections for high-performance hard drives and Solid State Drives (SSDs).

Featuring HyperDuo technology, the SATA card offers SSD auto-tiering which lets you balance the performance advantages of SSD storage with the cost-effectiveness and large capacity of standard hard drives. By combining SSD and HDD drives into a single volume (up to 3 SSD + 1 HDD), HyperDuo discreetly works in the background to identify and move frequently accessed files to the faster SSD drive(s) for improved data throughput - up to 80% of SSD performance! (Note: The HyperDuo automatic storage tiering feature is compatible with computers that use a BIOS.)

The PCIe SATA controller card supports Port Multiplier (PM), enabling multiple SATA drives to be connected to one port over a single cable, for a total of 7 drives (Up to 4 drives through PM on one port, and a single drive to the remaining 3 ports). Plus, the SATA controller card offers an effective

hardware RAID solution, with native RAID (0, 1, 1+0) support.

Drives Used:

SSD: OCZ Vertex 3 Series 2.5” 120 GB (VTX3-25SAT3-120G)

HDD: Western Digital Caviar Green 3.5” 2 TB (WD20EARS)

Software Used:

IO Meter, 256KB Sequential Read, queue depth = 10

This PCIe SATA 6gbps card is backed by a 2-year StarTech.com warranty and free lifetime technical support.

Techninė specifikacija

Ryšys	
Palaikomi saugojimo kaupiklių sąsajos	SATA, „Serial ATA III“
Priimančioji sąsaja	PCI Express
PCI „Express“ angų versija	2.0
Vidinių SATA prievadų skaičius	4
Veikimo charakteristikos	
RAID lygiai	0, 1, 10, JBOD
Duomenų perdavimo sparta	6 Gbit/s
SSD palaikymas	Taip
Lustų rinkinys	Marvell - 88SE9230
Palaikomas nuoseklus adresavimo blokavimas (LBA)	48 bitai
Techninė informacija	
Atitikties sertifikatai	CE, RoHS
Tvarumo reikalavimų laikymasis	Taip
Sistemos reikalavimai	

Palaikomos „Windows“ operacinės sistemos	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 11, Windows 11 x64, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Mac suderinamumas	Taip
Palaikomos MAC operacinės sistemos	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Palaikoma operacinė sistema „Linux“	Taip
Palaikomos serverio valdymo sistemos	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019

Aplinkos sąlygos

Darbo temperatūros diapazonas (TT)	5 - 50 °C
Sandėliavimo temperatūros norma (T-T)	-25 - 70 °C
Darbo santykinės drėgmės diapazonas	20 - 80%

Svoris ir matmenys

Plotis	120 mm
Ilgis	70 mm
Aukštis	20 mm
Svoris	49 g
Pakuotės plotis	144 mm
Pakuotės gylis	174 mm
Pakuotės aukštis	30 mm
Paketo svoris	141 g

Logistikos duomenys

Pagrindinės (išorinės) dėžės plotis	382 mm
Pagrindinės (išorinės) dėžės ilgis	498 mm
Pagrindinės (išorinės) dėžės aukštis	322 mm
Gaminių skaičius pagrindinėje (išorinėje) dėžėje	60 vnt
Darniosios sistemos (DS) kodas	84733080

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Kitos savybės	
Instrukcija	Taip
Tvarkyklės įskaitytos	Taip
PCI kortos formos koeficientas	Visas aukštis (žemo profilio)

Matmenys ir svoris	
Matmenys (I × P × A)	18,00cm × 15,00cm × 3,00cm
Svoris	0,15kg

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

StarTech.com Ltd.
Artisans Crescent 45, N5V 5E9 Ontario, London, CA
startech.com

ATSAKINGAS ASMUO ES

StarTech.com Limited
Laarderhoogtweg 25, 1101 EB Amsterdam, NL
startech.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt