

Hannspree HO 275 PTB kompiuterio monitorius 68,6 cm (27") 1920 x 1080 pikseliai „Full HD“ LED Lietimui jautrus ekranas Juoda

Gamintojas: **HANNSPREE** · Modelis: **HO275PTB** · EAN: **4711404023330** · Prekės kodas: **893215**



496,90 €

Kaina su PVM

Be PVM: **410,66 €**

[Sandėlyje](#)



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 68,6 cm (27") Juoda
- ✓ Įmontuoti garsiakalbiai
- ✓ USB aukštakrypčio prievado tipas: B tipo USB HDMI „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 60 Hz Reakcijos laikas: 5 ms
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: TFT
- ✓ Energijos vartojimo efektyvumo klasė (SDR): D





Aprašymas

The HANNSpree HO275PTB 27" 16:9 Open-Frame monitor delivers a high-performance display solution. Its rugged bezel with edge-to-edge glass makes it very suitable for applications like tabletop integration.

The HANNSpree HO275PTB is an ideal display for integration in a kiosk, totem and a perfect solution for interactive digital signage, In-store Retail, Gaming and many other sectors.

VIVID IMAGES, LIFE LIKE VISUALS WITH ULTRA-WIDE VIEWING ANGLES

The Touch monitor HO275PTB features a 16:9 aspect ratio LED-backlit panel with a 178° ultra-wide view angle that minimizes colour shift on both horizontal and vertical planes to ensure quality visuals from almost any direction. It delivers improved colour accuracy plus increased energy efficiency.

The HO275PTB uses a 178°(H) / 178°(V) ultra-wide viewing angle Full HD panel that eliminates colour shift from almost any direction and in nearly every angle.

PROJECTED CAPACITIVE (PCAP) TOUCH TECHNOLOGY

Now multiple users can experience shared touchscreen interaction. Using up to 10 finger touchpoints, the HANNSpree HO275PTB Monitor allows everyone to play and collaborate at the same time.

The precise and accurate multi-touch display — allowing up to 10 simultaneous touches — allowing you to work smarter and more efficiently. There's no need for additional controllers – all they have to do is just reach out and touch the screen. It is certified for Windows 10 and designed to offer superior performance as well as intuitive control, so you can be more productive and do everything you want to do smoothly and quickly. With Projected Capacitive Touch, users can enjoy a smoother and more accurate touch display experience with increased interactivity. Thanks to the glass overlay this technology is highly durable, the Touch performance is unaffected by everyday use and mishaps such as dirt, dust, condensation, liquid spills or cleaning solutions.

This technology delivers super-fast, sensitive touch response with excellent dragging performance and perfect picture quality. Ten-point multi-touch support lets you unlock the power of today's touch-enabled applications.

EXTENSIVE CONNECTIVITY

The HANNSpree HO275PTB features a host of connectivity options that include VGA, HDMI and DP.

The HO275PTB Open Frame Touch Monitor ensures that your monitor is more compatible and ready to handle all of your content.

Enabling touch is easy! Simply connect the USB cable from your PC to the monitor's USB upstream port, and connect one of the video inputs to project images onscreen

SCRATCH RESISTANT - MULTI-TOUCH SCREEN WITH 7H SURFACE HARDNESS

7H scratch resistant surface hardness ensures durability, as well as a consistent high-quality touch experience.

Scratch resistance is essential for touch solutions used for education and public environment. This is achieved thanks to a glass overlay covering the screen. This means that the panel surface can withstand impact from objects and scratches, making it perfect for public spaces and educational institutions.

Our toughened Hard Glass fronted LED Monitors ($\geq 7H$ hardness rating) are designed specifically for retail and Industrial applications offering protection from impacts and dirt for a long-life solution.

It guarantees high durability of the touch function and even more importantly the touch function remains unaffected even if the glass is scratched.

MOUNTING OPTIONS

Its rugged bezel with edge-to-edge glass makes it very suitable for applications like tabletop integration.

The display supports rear VESA and external mounting brackets for multiple mounting options.

The brackets provide the benefits of easy installation and flexibility for different applications.

Supports Multiple Mounting Options

Slim profile with narrow edges

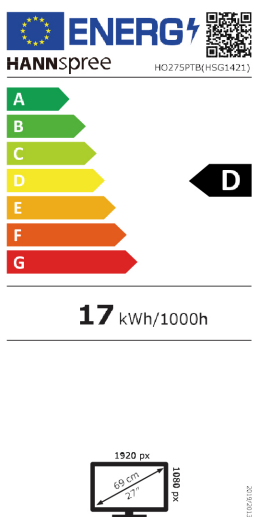
Techninė specifikacija

Ekranas	
Ekranas įstrižainė	68,6 cm (27")
Ekranas rezoliucija	1920 x 1080 pikseliai
Natūralus kraštinių santykis	16:9
Ekranas technologija	LED
Lietimui jautrus ekranas	Taip
HD tipas	„Full HD“
Skydo tipas	TFT
Reakcijos laikas	5 ms
Ekranas forma	Plokščias
Kontrasto santykis (tipinis)	1000:1
Maksimalus atnaujinimo dažnis	60 Hz
Ekranas spalvų skaičius	16,78 milijonai spalvų
Liečiamo ekranas technologija	Prognazuojama talpinė sistema
Lietimui jautri technologija	„Multi-touch“
Vienalaikių kontaktinių taškų skaičius	10
Ekranas ryškumas	260 cd/m ²
Kontrasto santykis (dinaminis)	8000000:1
Matymo kampas, horizontalus	178°
Matymo kampas, vertikalus	178°
Pikselių žingsnis	0,311 x 0,311 mm
Horizontali diapazono riba	30 - 83 kHz
Vertikali diapazono riba	56 - 75 Hz
Ekranas įstrižainės dydis (metrinė)	68,58 cm

Paviršiaus kietumas	7H
Veikimo charakteristikos	
NVIDIA G-SYNC	Ne
„AMD FreeSync“	Ne
Multimedija	
Įmontuoti garsiakalbiai	Taip
Integruota kamera	Ne
Garsiakalbių skaičius	2
RMS galingumas	2 W
Įmontuotas mikrofonas	Ne
Konstrukcija	
Produkto spalva	Juoda
Stiklo storis	3 mm
Ryšys	
HDMI	Taip
Ausinių išvestis	Taip
USB aukštakrypčio prievado tipas	B tipo USB
Priešsrovinių prievadų skaičius	1
USB lietimui jautrus prievadas	Taip
USB lietimui jautrių prievadų kiekis	1
VGA (D-Sub) portų kiekis	1
HDMI portų kiekis	1
„DisplayPort“ kiekis	1
Ausinių išvestys	1
Ergonomija	
VESA tvirtinimo pagrindas	Taip
Montuojamas ant sienos	Taip
Virtualusis ekranas (OSD)	Taip
OSD kalbų skaičius	11
Energijos valdymas	
Energijos vartojimo efektyvumo klasė (SDR)	D
Energijos vartojimo efektyvumo klasė (HDR)	Nepasiekiamo
Energijos sąnaudos (SDR) per 1000 valandų	16,8 kWh
Energijos suvartojimas	40 W

Energijos suvartojimas (laukimo režimu)	0,5 W
Energijos suvartojimas (off)	0,3 W
AC įėjimo įtampa	100 - 240 V
AC įėjimo dažnis	50 / 60 Hz
Maitinimo tipas	Vidinis
Energijos efektyvumo skalė	Nuo A iki G
Svoris ir matmenys	
Plotis (be stovo)	649,2 mm
Gylis (be stovo)	47 mm
Aukštis (be stovo)	387 mm
Pakuotės duomenys	
Pakuotės plotis	735 mm
Pakuotės gylis	146 mm
Pakuotės aukštis	480 mm
Pakuotės turinys	
Pridėti kabeliai	AC, HDMI, Iš A tipo USB į B tipo USB
Kitos savybės	
Tarptautinės apsaugos (IP) kodas	IP65
Logistikos duomenys	
Darniosios sistemos (DS) kodas	85285210
Matmenys ir svoris	
Svoris	10,46kg

Energijos efektyvumas ir ekologinis projektavimas


 Energijos efektyvumo klasė **D A-G**

- › Energijos etiketė
- › Gaminio informacijos lapas
- › EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- > [Gaminio lankstinukas](#)
- > [Vaizdo įrašas](#) youtube.com/watch?v=ffUBGGx6ksA

Gamintojo ir saugos informacija

GAMINTOJAS

Hannspree Europe Holdings B.V.

Newtonweg 25, 5928 PN Venlo, NL

hannspree.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt