iiyama OTF2216MC-B1 kompiuterio monitorius 54,6 cm (21.5") 1920 x 1080 pikseliai „Full HD“ LCD Lietimui jautrus ekranas Juoda

Gamintojas: **IIYAMA** · Modelis: **OTF2216MC-B1** · EAN: **4948570123735** · Prekės kodas: **894455**



1 100,89 €

Kaina su PVM

Be PVM: **909,83 €**

Sandėlyje

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 54,6 cm (21.5") Juoda
- ✓ HDMI „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 60 Hz Reakcijos laikas: 25 ms
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: VA
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ErP CE, cULus, EAC, REACH, RoHS, UKCA, WEEE















Aprašymas

Built into a rugged, edge-to-edge glass bezel the ProLite OTF2216MC-B1 guarantees high durability and scratch-resistance, making it perfect for high use public facing applications. Landscape, portrait and face-up orientation ensure flexibility in any type of installation. It offers a brightness of up to 935 cd/m2, the content displayed will be visible even in very bright environments. The anti-glare display is UV resistant and IP65 protected, ensuring durability against sunlight, dust and water resistance from the front, additionally it can operate in temperatures ranging from -20˚C up to +60˚C. The anti-fingerprint coating ensures a smoother touch. A reliable solution for pick-up points and kiosks. A proximity sensor turns off the screen when no one is present, an ambient light sensor adjusts screen brightness, and a temperature sensor controls fan speed for cooling, resulting in energy savings and extended product durability. For ease of integration, the ProLite OTF2216MC-B1 can be equipped with optional external mounting brackets (OMK3-1) making it an ideal solution for kiosk integrators, industrial environments, control rooms and interactive multimedia.

Techninė specifikacija

Display	
Display diagonal	54.6 cm (21.5")
Display resolution	1920 x 1080 pixels
Native aspect ratio	16:9
Display technology	LCD
Touchscreen	Yes
HD type	Full HD
Panel type	VA
Response time	25 ms
Screen shape	Flat
Contrast ratio (typical)	5000:1
Maximum refresh rate	60 Hz
Display number of colours	16.7 million colours
Touchscreen technology	Projected capacitive system
Touch technology	Multi-touch
Number of simultaneous touchpoints	10
Display brightness (peak)	1100 cd/m²
Display brightness (typical)	1100 cd/m²
Display brightness	935 cd/m²
Viewing angle, horizontal	178°
Viewing angle, vertical	178°

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Pixel pitch	0.248 x 0.248 mm
Horizontal scan range	31.4 - 82 kHz
Viewable size, horizontal	47.7 cm
Viewable size, vertical	26.9 cm
Digital horizontal frequency	31.8 - 82 kHz
Display diagonal (metric)	54.6 cm
Surface hardness	7H
Colour depth	8 bit
Performance	
Palm rejection	Yes
Design	
Market positioning	Office
Product colour	Black
Front bezel colour	Black
Glass thickness	3.15 mm
Ports & interfaces	
HDMI	Yes
Headphone out	Yes
USB Touch port	Yes
VGA (D-Sub) ports quantity	1
DVI port	No
HDMI ports quantity	1
DisplayPorts quantity	1
HDCP	Yes
Network	
Wi-Fi	No
Ethernet LAN	Yes
Ergonomics	
VESA mounting	Yes
Panel mounting interface	100 x 100 mm
Cable management	Yes
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	Traditional Chinese, German, English, Spanish, French, Italian, Japanese
Number of OSD languages	7

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.


Power	
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	15.5 kWh
Power consumption (typical)	43 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.3 W
AC adapter output voltage	12 V
Power supply type	External
Energy efficiency scale	A to G
Operational conditions	
Operating temperature (T-T)	-20 - 60 °C
Weight & dimensions	
Width (with stand)	520 mm
Depth (with stand)	42.5 mm
Height (with stand)	315 mm
Weight (with stand)	4.6 kg
Width (without stand)	520 mm
Depth (without stand)	42.5 mm
Height (without stand)	315 mm
Weight (without stand)	4.6 kg
Packaging data	
Package width	608 mm
Package depth	150 mm
Package height	400 mm
Package weight	4.5 kg
Packaging content	
Cables included	AC, USB, HDMI, DisplayPort
Remote control included	Yes
Quick start guide	Yes
Sustainability	
Sustainability certificates	ErP
Other features	
International Protection (IP) code	IP65

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
AC adapter included	Yes
Placement supported	Indoor
Brightness	935 cd/m²
Packaging content	AC adapter
Active display area (W x H)	477 x 269 mm
Weight	4.6 kg
Height	315 mm
Width	520 mm
Depth	42.5 mm
Compliance certificates	CE, cULus, EAC, REACH, RoHS, UKCA, WEEE
Mean time between failures (MTBF)	60000 h
Ethernet LAN (RJ-45) ports	1
Certification	CE, EAC, RoHS support, ErP, WEEE, cULus, REACH, UKCA
User controls	picture (contrast, brightness, H. position, V. position, phase, clock, auto adjust), advanced (colour temperature, sharpness), OSD (OSD timeout, OSD position, OSD H. position, OSD V. position, touch switch, factory), option (reset, language, source select, display mode, fan control, presence sensor, ambient light sensor)
Touch method	finger, glove (latex)
Control panel	Menu, Scroll up / Brightness, Scroll down / Contrast, Select, Power
Technical details	
Native refresh rate	60 Hz
Matmenys ir svoris	
Matmenys (I × P × A)	61,00cm × 41,00cm × 15,00cm
Svoris	7,39kg

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Energijos efektyvumas ir ekologinis projektavimas

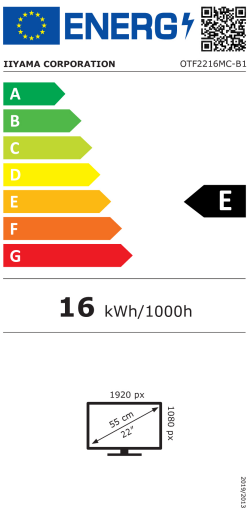

2019/2013

Energijos efektyvumo klasė **E** A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt