

Axagon ADSA-1S6 saugojimo diskų korpusas HDD / SSD aptvaras Juoda 2.5"

Gamintojas: **AXAGON** · Modelis: **ADSA-1S6** · EAN: **8595247903075** · Prekės kodas: **907000**



12,90 €

Kaina su PVM

Be PVM: **10,66 €**

Sandėlyje





Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ HDD / SSD aptvaras SATA, „Serial ATA II“, „Serial ATA III“ 2.5"
- ✓ Palaikomų saugojimo tvarkyklių skaičius: 1
- ✓ Pakeitimas neišjungus
- ✓ USB jungtis
- ✓ S.M.A.R.T. palaikymas TRIM palaikymas UASP palaikymas
- ✓ 5 Gbit/s
- ✓ Maitinimo šaltinio tipas: USB
- ✓ Juoda



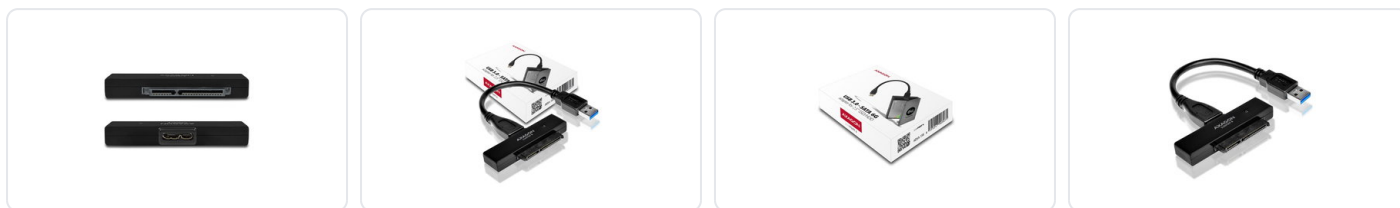

Aprašymas

A compact AXAGON ADSA-156 SLIMport6 high-speed adapter with USB 3.0 and SATA 6G interface intended for easy connection of SSD or 2.5" SATA disk.

A handy tool to quickly connect a SSD or laptop disk, including boot support.

The UASP support significantly increases transmission rates especially when working with small files in the queue.

The TRIM feature support limits the gradual degradation of SSD performance over time.

Reading of S.M.A.R.T. information monitoring the condition of the connected disks. Supports spinning down of connected disks as well as an adapter.

The installation can be handled even by a layman - the disk connects to the adapter and the adapter to the computer's USB port; the rest is done automatically.

Minimum dimensions and weight, along with an enclosed disc case, make the product ideally suited even for mobile use.

Features:

- Compatible with USB 3.0 and backward compatible with USB 2.0.
- Supports transmission rates 12 / 480 / 5000 Mb/s (low / full / high speed).
- Supports 2.5" SATA III / II / I disks of all capacities.
- Compliant with Serial ATA 3.1 specification (SATA/600), transmission rates of up to 6 Gb/s.
- Compliant with Serial ATA 2.0 specification (SATA/300), transmission rates of up to 3 Gb/s (300 MB/s).
- Compliant with Serial ATA 1.0 specification (SATA/150), transmission rates of up to 1.5 Gb/s (150 MB/s).
- The total bandwidth / transmission rate of the adapter is determined by the USB 3.0 interface used (theor. 5 Gbit/s).
- Supports UASP (USB Attached SCSI Protocol) and BOT (Bulk-Only Transport).
- Supports booting from SSD/HDD connected via an USB adapter.
- HDD Auto Spindown - automatic spindown of a disk after period of inactivity lasting 22 minutes.
- HDD Turn Off - turns off the disk after removing the device or spinning down the PC.
- Possibility to connect your device while running thanks to the Hot Plug support.
- Full Plug and Play support.
- Connection via USB 3.0 micro B female connector.
- USB 3.0 cable USB 3.0 Type A male / USB 3.0 Type B male 10 cm long is included.
- Supplying the power via USB 3.0 bus up to 900mA from one USB port is sufficient in all cases.
- A blue LED indicating the connection to the computer's USB port (permanent light) and data transmission (blinking).
- Compact adapter dimensions 70 x 21 x 10 mm.
- Adapter weight only 11 g, weight of USB cable 18 g.
- Simple plastic case holds 2.5" disk max. 9.5 mm high with USB adapter connected (USB cable is led out through hole in the case).
- For thin 7mm SSDs/HDDs foam pads are included for better fit in the case.
- The case can also serve to transport or store the adapter itself without the disk, with the USB cable inside the case.
- Case dimensions 122 x 78 x 19 mm.
- Case weight 40 g.

Supported OSs:

- MS Windows XP / Vista / 7 / 8 / 8.1 / 10 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.x and higher, Linux with kernel 2.6.x and above.
- Note: Drivers are included with supported operating systems and are installed completely automatically. No other drivers need to be installed and are not even available.

Package contains:

- USB 3.0 - SATA 6G adapter,
- USB 3.0 cable 10 cm,
- plastic case for 2.5" disk and USB adapter,
- foam pads for 7 mm HDDs and SSDs,
- Packed in a cardboard box with the installation procedure included.

Techninė specifikacija

Laikmenos	
Saugojimo kaupiklio dydis	2.5"
Palaikomi saugojimo kaupiklių sąsajos	SATA, „Serial ATA II“, „Serial ATA III“
Palaikomų saugojimo tvarkyklių skaičius	1
Palaikomi saugojimo kaupiklių aukščiai	5,7,9.5 mm
NVMe	Ne
Pakeitimas neišjungus	Taip
Ryšys	
USB jungtis	Taip
USB versija	2.0/3.2 Gen 1 (3.1 Gen 1)
USB jungtis	USB A tipo
USB jungties lytis	Kištukinis
Integruotas USB kabelis	Taip
Konstrukcija	
Gaminio tipas	HDD / SSD aptvaras
Produkto spalva	Juoda
Medžiaga	Plastikas
LED indikatoriai	Taip
Suderinami produktai	2,5" HDD/SSD
Sertifikavimas	CE, RoHS
Veikimo charakteristikos	
Duomenų perdavimo sparta	5 Gbit/s
UASP palaikymas	Taip
TRIM palaikymas	Taip

S.M.A.R.T. palaikymas	Taip
„Plug and Play“ funkcija	Taip
Kilmės šalis	Kinija
Energijos valdymas	
Maitinimo šaltinio tipas	USB
Sistemos reikalavimai	
Palaikomos mobiliosios operacinės sistemos	Taip
Palaikomos „Windows“ operacinės sistemos	Taip
Palaikoma operacinė sistema „Linux“	Taip
Palaikomos MAC operacinės sistemos	Taip
Svoris ir matmenys	
Plotis	122 mm
Ilgis	78 mm
Aukštis	19 mm
Svoris	40 g
Kabelio ilgis	0,1 m
Pakuotės plotis	130 mm
Pakuotės gylis	177 mm
Pakuotės aukštis	40 mm
Paketo svoris	139 g
Pakuotės turinys	
Pakuotės tipas	„Box“
Pridėti kabeliai	USB
Instrukcija	Taip
Kitos savybės	
Suderinamos operacinės sistemos	MS Windows XP / Vista / 7 / 8 / 8.1 / 10 and later, Windows Server 2003 / 2008 / 2012 / 2016 and later (supported are all 32- and 64-bit Windows OS versions), Mac OS X 10.x and higher, Linux with kernel 2.6.x and above
Techninė informacija	
Tvarumo sertifikatai	RoHS
Garantinis laikotarpis	3 metai
Atitikties sertifikatai	RoHS, CE
Matmenys ir svoris	
Matmenys (I × P × A)	13,00cm × 18,00cm × 4,00cm
Svoris	0,13kg

Dokumentai ir vaizdo įrašai

› [Naudojimo instrukcija](#)

Gamintojo ir saugos informacija

GAMINTOJAS

RealQ, s.r.o.

Železná 663/5, 619 00 Brno-jih, CZ

axagon.eu

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt