

Sharp MultiSync M862 Digital signage flat panel 2.18 m (86") LCD 550 cd/m² 4K Ultra HD Black 24/7

Gamintojas: **SHARP** · Modelis: **PNM862** · EAN: **4550556176651** · Prekės kodas: **928402**



4 222,90 €

Kaina su PVM

Be PVM: **3 490,00 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Seamless meeting workflows – a single USB-C cable transmits video, data, and power for instant, clutter-free meeting setups. As the established standard for modern collaboration spaces, USB-C supports frictionless BYOD experiences
- ✓ Unhindered readability – a high-haze panel reduces glare from windows and ambient light, keeping signage content and presentations clear for uninterrupted viewing in any environment
- ✓ Security assured – 802.1x support over LAN enables high-level security for corporate networks, giving peace of mind for IT teams and enterprise environments
- ✓ Enhanced imaging precision – when brand consistency and corporate identity are important, NEC's SpectraView Engine provides full control over colour, gamma, and uniformity for accurate and impactful content
- ✓ Broad AV compatibility – fully interoperable with leading meeting room platforms including Crestron (XiO Cloud), Cisco Webex, Q-Sys, and Microsoft Teams, ensuring effortless integration and future-proof scalability



Aprašymas

Built to perform, designed to last

The versatile solution for professional display applications, the Sharp MultiSync® M2 Series (32" up to 98") is purpose-built for demanding signage and meeting room environments. With native USB-C connectivity and broad compatibility with platforms such as Crestron, Cisco Webex, and Microsoft Teams, it enables seamless BYOD collaboration and future-ready integration, while 802.1x LAN support ensures enterprise-grade network security. Featuring class-leading 550 cd/m² brightness, a high-haze panel to minimise glare, and NEC's trusted SpectraView Engine, the M2 Series delivers outstanding visual performance with unmatched colour precision.

As part of the new Sharp-branded display family, the MultiSync® M2 Series builds on NEC's legacy of quality and reliability to drive greater efficiency and long-term value. Its proven modular design supports custom computing options (Raspberry Pi or Intel® SDM) and flexible connectivity (e.g. AV-over-IP), ensuring lasting versatility, performance, and sustainability.

Techninė specifikacija

Display	
Display diagonal	2.18 m (86")
Display technology	LCD
Display resolution	3840 x 2160 pixels
Display brightness	550 cd/m²
HD type	4K Ultra HD
Touchscreen	No
Panel type	IPS
LED backlight	Yes
LED backlighting type	Direct-LED
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	8000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.073 billion colours
Display diagonal (metric)	217.2 cm
Horizontal scan range	15 - 135 kHz
Vertical scan range	23 - 76 Hz
High Dynamic Range (HDR) supported	Yes
Native refresh rate	60 Hz
RGB colour space	NTSC
Ports & interfaces	
HDMI ports quantity	3
DVI port	No
DisplayPorts quantity	2
USB port	Yes

HDMI input ports quantity	2
HDMI output ports quantity	1
DisplayPorts in	1
DisplayPorts out	1
DisplayPort version	1.2
USB ports quantity	4
USB connector type	USB Type-A, USB Type-C
USB Type-C DisplayPort Alternate Mode	Yes
Ethernet LAN (RJ-45) ports	2
RS-232C	Yes
Remote (IR) input	1
Audio Return Channel (ARC)	Yes
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Orientation	Horizontal/Vertical
Screen shape	Flat
Panel mounting interface	600 x 400 mm
Bezel width (bottom)	1.48 cm
Bezel width (side)	1.43 cm
Bezel width (top)	1.43 cm
Mounting type	Wall
Performance	
Purpose	Universal
Operating hours (hours/days)	24/7
HDCP	Yes
HDCP version	2.2
Power	

Power consumption (standby)	0.5 W
Energy efficiency class (SDR)	G
Energy efficiency class (HDR)	G
Energy consumption (SDR) per 1000 hours	189 kWh
Energy consumption (HDR) per 1000 hours	167 kWh
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Energy efficiency scale	A to G

Weight & dimensions

Display width	1927.6 mm
Display depth	83.2 mm
Display height	1099.1 mm
Display weight	47 kg

Packaging data

Package width	2090 mm
Package depth	225 mm
Package height	1225 mm
Package weight	64 kg

Packaging content

Remote control included	Yes
Batteries included	Yes
Cables included	AC, HDMI

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	-20 - 60%

Sensors

Ambient light sensor	Yes
Eco sensor	Yes

Network

Ethernet LAN	Yes
Ethernet LAN data rates	100 Mbit/s

Technical details

Sustainability certificates

ENERGY STAR

Compliance certificates

CE, Electromagnetic Compatibility (EMC), Federal Communications Commission (FCC), REACH, RoHS, UKCA, UL

Other features

Headphone connectivity

3.5 mm

Headphone outputs


1

Matmenys ir svoris

Svoris

65,50kg

Energijos efektyvumas ir ekologinis projektavimas

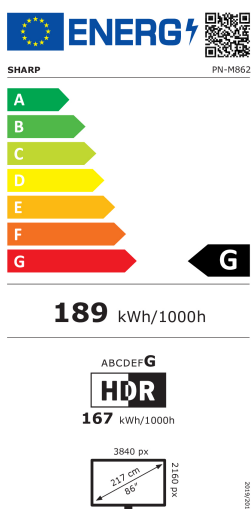

Energijos efektyvumo klasė

G A-G

- > [Energijos etiketė](#)
- > [Gaminio informacijos lapas](#)
- > [EPREL duomenų bazė](#)

Dokumentai ir vaizdo įrašai

- > [Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

Sharp Corporation

Takumi-cho, Sakai-ku 1, 590-8522 Sakai, JP

global.sharp

ATSAKINGAS ASMUO ES

SHARP BUSINESS SYSTEMS DEUTSCHLAND GMBH

Industriestraße 180, 50999 Köln, DE

sharp.de

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt