Viewsonic XF2730 27” Open Frame Touch Monitor for 24/7 Continuous Operation

Gamintojas: **VIEWSONIC** · Modelis: **XF2730** · EAN: **766907029987** · Prekės kodas: **929589**



507,90 €

Kaina su PVM

Be PVM: **419,75 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 10-point PCAP Touch Technology
- ✓ IP65 Dustproof & Water-resistant Screen
- ✓ 24/7 Operation
- ✓ MoHs 7 Scratch-Resistant Surface
- ✓ VESA-mountable








Aprašymas

The ViewSonic XF2730 is an open-frame monitor designed for commercial and industrial applications, such as ATMs, kiosks, and vending machines, ensuring reliable 24/7 operation. Its durable 3mm thick glass screen protects against moisture and scratches, ensuring long-lasting performance. The intuitive 10-point PCAP touch technology delivers smooth, responsive interaction, enhancing the user experience. With versatile connectivity

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

options, including HDMI, DisplayPort, and VGA, content sharing is simple and seamless. The VESA-compatible design allows for flexible installation on any surface or orientation. Optional features include a wide operating temperature range from -30°C to 85°C for demanding environments, stylus support with either EMP or MPP technology, and a light sensor that adjusts screen brightness for optimal visibility and energy efficiency.

Reliable Touch Monitor for Any Application

The XF2730 touch monitor provides a user-friendly, durable, and pollution-resistant solution for industrial, retail, and commercial settings. Perfect for point-of-sale systems, self-ordering kiosks, vending machines, or bank ATMs, it delivers outstanding image quality, flexible mounting options, and responsive 10-point touch technology.

Advanced Touch Technology

Streamline your operations with a smooth and responsive touchscreen, powered by advanced Projective Capacitive (PCAP) Touch Technology. This screen accurately detects up to 10 simultaneous touch points, ensuring precise and reliable input with every interaction.

IP65 Dustproof & Water-resistant Screen

The IP65-rated screen is fully protected against dust and water splash, ensuring durability even in harsh conditions. Its robust design minimizes downtime and maintenance costs, maintaining continuous productivity in demanding environments. Additionally, the screen features a 7H scratch-resistant surface for long-lasting clarity and enhanced durability.

Long-Lasting Performance

Designed for 24/7 operation in demanding environments, the XF2730 delivers reliable performance and maximum uptime, ensuring your operations run seamlessly around the clock.

Seamless Touch and Pen Precision with MPP & EMP (optional)

The XF2730 supports MPP 1.5 or higher (Microsoft Pen Protocol) and EMP technology for precise, responsive touch input. It‘s highly durable and requires no charging (EMP), making it perfect for industrial and commercial use, enhancing efficiency and user experience.

Effortless Content Sharing

Streamline operations with seamless content-sharing capabilities. With multiple inputs, including HDMI, DisplayPort, and VGA, external consoles, laptops, or high-definition devices can be effortlessly connected to share content with ease.

Techninė specifikacija

Display	
Display diagonal	68.6 cm (27")
Display resolution	1920 x 1080 pixels
HD type	Full HD
Touchscreen	Yes
Display brightness	255 cd/m²
Touchscreen type	Projected Capacitive (PCAP)
Surface hardness	7H
Pixel pitch	0.31 x 0.31 mm

Contrast ratio (typical)	1000:1
Response time	14 ms
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Native aspect ratio	16:9
Effective viewing area	597.9 x 336.3 mm
Features	
Product colour	Black
VESA mounting	Yes
Mean time between failures (MTBF)	50000 h
Windows operating systems supported	Yes
Mac operating systems supported	MacOS
Ports & interfaces	
Interface	DisplayPort + HDMI + VGA + USB Type-B
USB 2.0 ports quantity	1
Power	
Power source type	DC
AC adapter input voltage	100 - 240 V
AC adapter output voltage	12 V
AC adapter output current	4 A
Energy efficiency class (SDR)	D
Energy consumption per 1000 hours	16 kWh
Weight & dimensions	
Width	650.4 mm
Depth	50.7 mm
Height	388.4 mm
Weight	9.26 kg
Packaging data	
Package width	750 mm
Package depth	140 mm
Package height	510 mm
Package weight	11.1 kg
Operational conditions	
Operating temperature (T-T)	0 - 50 °C

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Operating relative humidity (H-H)	5 - 90%
Storage temperature (T-T)	-20 - 60 °C


Technical details

Compliance certificates	CB, CE, Federal Communications Commission (FCC), RoHS

Logistics data

Products per master (outer) case	1 pc(s)
Pallet gross width	120 cm
Pallet gross length	100 cm
Pallet gross height	2.16 m

Energijos efektyvumas ir ekologinis projektavimas

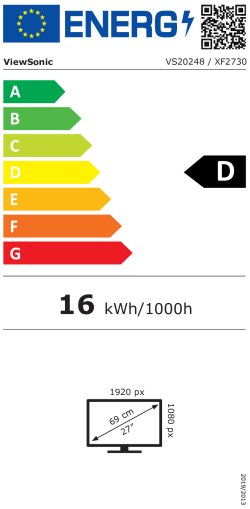

Energijos efektyvumo klasė **D** A–G

- Energijos etiketė
- EPREL duomenų bazė

Gamintojo ir saugos informacija

GAMINTOJAS

Viewsonic

ATSAKINGAS ASMUO ES

ViewSonic Technology GMBH
Fürst-Leopold-Platz 1, 46284 Dorsten, DE
viewsonic.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt