Axagon HMC-7HX2 knyginių kompiuterių dokas / jungčių replikatorius Vielinis USB 3.2 Gen 1 (3.1 Gen 1) Type-C Pilka

Gamintojas: **AXAGON** · Modelis: **HMC-7HX2** · EAN: **8595247908681** · Prekės kodas: **932429**



72,90 €

Kaina su PVM

Be PVM: **60,25 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Vielinis
- ✓ Priimančioji sąsaja: USB 3.2 Gen 1 (3.1 Gen 1) Type-C
- ✓ „USB Power Delivery“
- ✓ Ethernet LAN jungtis 10,100,1000 Mbit/ai
- ✓ „Plug and Play“ funkcija

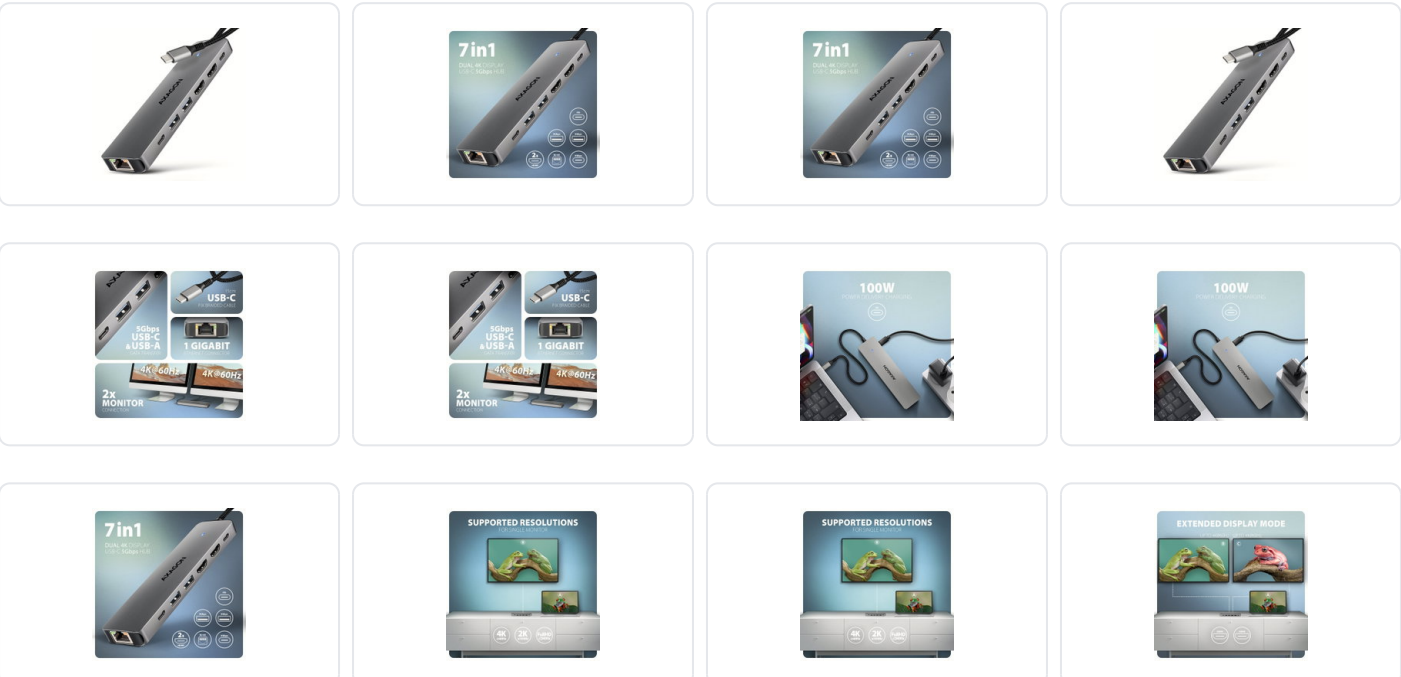

Aprašymas

The multi-port USB-C 5Gbps AXAGON HMC-7HX2 DUAL 4K DISPLAY 7in1 hub expands your laptop, computer or phone with seven ports. Connect your laptop to the hub via a 15 cm long USB-C cable. You immediately have a connection for a two 4K monitors, three USB devices and an RJ-45 connector for a Gigabit Ethernet network. You also get the possibility to supply laptop using Power Delivery technology at the same time. The port replicator will provide you with a simple and compact 7in1 docking station for modern laptops.

The USB hub offers three USB 5Gbps outputs, two with standard USB-A and a third with USB-C data connector. Transfer rate is up to 5Gb/s thanks to USB 3.2 Gen 1 interface. The hub can permanently connect several external drives simultaneously and also allows charging of phones and tablets with up to 1.5A/5V current. From the hub, you can easily charge e.g. Android smartphone, Apple iPhone, Apple iPad etc.

Another USB-C connector is reserved only for charging phones or laptops using Power Delivery 3.0 technology with up to 100W of power. Connect a suitable USB-C Power Delivery charger into the hub and connect the hub to a laptop that supports Power Delivery. This saves one USB-C port.

Two HDMI outputs allow you to connect external monitors, TVs or projectors with up to 4K/60Hz Ultra HD resolution, even when two monitors are connected at the same time. Other popular resolutions are also supported, such as 2K/120Hz Quad HD or 1080p/240Hz Full HD and multi-channel audio transmission. Thanks to HDR support, you can enjoy a significantly expanded range of colours and contrasts without limitations.

Gigabit network card extends your computer by a fast and stable network connection, adds the missing RJ-45 network connector or another network card.

The compact aluminium body not only looks great, but also provides mechanical durability and passive cooling. USB-C hub is an ideal accessory for laptops without USB-A connectors and video output. You can use your current USB peripherals without having to purchase new ones. Thanks to the Plug and Play and Hot Plug functions, connecting the hub itself is very simple without complicated installation, and peripherals can also be easily connected and disconnected while the computer is running.

For the hub to function properly, your laptop's USB-C port must support video output (DisplayPort Alternate Mode or Thunderbolt 3, 4 and above) and Power Delivery powered.

The hub can easily connect to phones with a USB-C connector. For example, you can connect a flash drive, keyboard, mouse, display, TV or projector to the phone.

Input (computer, tablet or phone connection):
• USB 5Gbps (USB 3.2 Gen 1 / USB 3.0), USB-C male connector.
• Compatible with USB 10Gbps, USB4, Thunderbolt 3/4/5.

Input (power supply):
• USB Power Delivery 3.0 - 100W port, USB-C female connector.
• Charging of the notebook from the power adapter via USB-C hub.
• PD power must be supported by both the laptop (tablet, phone) and the wall charger.

USB outputs:
• 2x USB 5Gbps port, USB-A female connector.
• 1x USB 5Gbps port, USB-C female connector.
• USB-C hub can handle the connection of several external drives at the same time.
• Charging of mobile devices (including iPad) with a current of up to 1.5A/5V from the hub's USB-A and USB-C ports.

Video output:
• 2x HDMI A port, HDMI A female connector.

Maximum supported resolution:

• 1 monitor - up to 4K/60Hz Ultra HD, 2K/144Hz Quad HD, 1080p/240Hz Full HD.
• 2 monitors - up to 4K/60Hz Ultra HD, 2K/144Hz Quad HD, 1080p/240Hz Full HD.

Video features:
• For Apple devices running macOS, the maximum refresh rate is usually limited to 60Hz.
• To achieve maximum resolution and frequency values on video outputs, the hub must be plugged into a USB-C port supporting DisplayPort Alternate Mode (DP Alt Mode) version min. 1.4 or a USB-C port supporting min. Thunderbolt 3. • A suitable updated OS and up-to-date graphics drivers are also required.
• HDR support (High dynamic range, 10-bit support) - realistic reproduction of light and dark details.
• HPD (Hot-Plug-Detect) support.
• TMDS (Transition Minimized Differential Signalling) support.
• Full support for HDCP 1.4 and 2.2 (High-bandwidth Digital Content Protection).
• 8-channel LPCM audio, compressed audio (AC-3, DTS) and HBR audio format support.
• Supports sample rates up to 192 kHz and up to 24-bit audio - depends on the source and destination device, i.e. laptop/phone and TV/monitor/AV receiver.

RJ-45 output:
• Gigabit Ethernet interface with RJ-45 connector for UTP or STP cable connection.
• Supported transmission rates for the Ethernet interface 10/100/1000 Mb/s.
• Supported IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T. specifications.
• 10/100/1000 Mb/s auto-detection.

Other features:
• Possibility to connect your device while running thanks to the Hot Plug support.
• Full Plug and Play support.
• Standby mode support.
• Power supply via USB bus (USB bus power).
• Power supply via PD charger (not included).
• High quality shielded cable ensures fast communication speed and minimal unwanted interference.
• Dimensions 13 x 134 x 34 mm (H x W x D).
• Weight 59 g (incl. cable).
• USB-C cable 15 cm long for connecting the hub to a laptop.

Supported operating systems:
• Windows 10 / 11, macOS, iPadOS, iOS, Linux, Chrome OS and Android.
• Compatibility depends on the operating system and device manufacturer support.
• DisplayPort Alternate Mode (DP Alt Mode) is only supported in updated OS and also depends on support from device (notebook, tablet, phone).
• Graphics card drivers may also affect the correct operation of the product. We recommend downloading the latest version of drivers.

Package contains:
• USB-C hub with fixed 15 cm long cable,
• multilingual manual CZ / DE / DK / ENG / ESP / EST / FIN / FR / GR / HR / HU / IT / LT / LV / NL / NOR / PL / PT / RO / SK / SLO / SRB / SWE / TR / UA / ALB / BG / BOS / CN / ARA,
• packed in a cardboard box with a hanging hole.

Techninė specifikacija

Ryšys	
Ryšio technologija	Vielinis
Priimančioji sąsaja	USB 3.2 Gen 1 (3.1 Gen 1) Type-C

USB 3.2 (3.1 1 kart.) A tipo prievadų skaičius	2
HDMI portų kiekis	2
Mikrofonas, line-in jack	Ne
USB 3.2 (3.1 1 kart.) C tipo prievadų skaičius	2
„USB Power Delivery“	Taip
USB maitinimo šaltinio peržiūra	3.0
USB maitinimo tiekimas iki	100 W
Jungtinis ausinių / mikrofono prievadas	Ne
HDCP	Taip
HDCP versija	1.4/2.2
„USB Type C DisplayPort Alternate Mode“	Taip
DC įėjimo lizdas	Ne
Tinklas	
Ethernet LAN jungtis	Taip
Ethernet LAN (RJ-45) portų kiekis	1
Eterneto LAN duomenų perdavimo norma	10,100,1000 Mbit/ai
Veikimo charakteristikos	
Produkto spalva	Pilka
Integruotas kortelių skaitytuvas	Ne
Duomenų perdavimo sparta	5 Gbit/s
HD tipas	4K Ultra HD
Maksimali skaitmeninė raiška	4096 x 2160 pikseliai
Palaikomų ekranų skaičius	2
Maksimalus atnaujinimo dažnis	240 Hz
Hot-Plug palaikymas	Taip
Palaikoma HDR	Taip
Lizdo sąsajos	HDMI, RJ-45, USB 3.2 Gen 1 (3.1 Gen 1) Type-C, USB 3.2 Gen 1 (3.1 Gen 1) Type-A
LED indikatoriai	Taip
„Plug and Play“ funkcija	Taip
Įkrovimo funkcija	Taip
Korpuso medžiaga	Aliuminis
Kilmės šalis	Kinija
Modelio suderinamumas	Universalus
Suderinamumas	universal
Sertifikavimas	CE, RoHS

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Garsas	
Įmontuoti garsiakalbiai	Ne
Įmontuotas mikrofonas	Ne
Aušinimas	
Įmontuotas ventiliatorius	Ne
Energijos valdymas	
Maitinimo šaltinio tipas	USB
Maitinimo jungtis	C tipo USB
USB kabelio ilgis	0,15 m
Belaidis įkrovimas	Ne
Programinė įranga	
Palaikomos „Windows“ operacinės sistemos	Taip
Palaikomos MAC operacinės sistemos	Taip
Palaikoma operacinė sistema „Linux“	Taip
Palaikomos serverio valdymo sistemos	Taip
Palaikomos mobiliosios operacinės sistemos	Taip
Kitos palaikomos operacinės sistemos	Taip
Svoris ir matmenys	
Plotis	13 mm
Ilgis	134 mm
Aukštis	34 mm
Svoris	59 g
Pakuotės duomenys	
Kiekis pakuotėje	1 vnt
Pakuotės plotis	203 mm
Pakuotės gylis	99 mm
Pakuotės aukštis	28 mm
Paketo svoris	103 g
Pakuotės turinys	
Pridėti kabeliai	C tipo USB
Instrukcija	Taip
Techninė informacija	
Garantinis laikotarpis	3 metai
Atitikties sertifikatai	CE, RoHS

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Matmenys ir svoris	
Matmenys (I × P × A)	3,00cm × 10,00cm × 20,00cm
Svoris	0,11kg

Dokumentai ir vaizdo įrašai

› Naudojimo instrukcija

Gamintojo ir saugos informacija

GAMINTOJAS

RealQ, s.r.o.
Železná 663/5, 619 00 Brno-jih, CZ
axagon.eu

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.