
D-Link DGS-1100-08PV2 Managed L2/L3 Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) Black

Gamintojas: **D-LINK** · Modelis: **DGS-1100-08PV2/E** · EAN: **790069467813** · Prekės kodas: **937398**

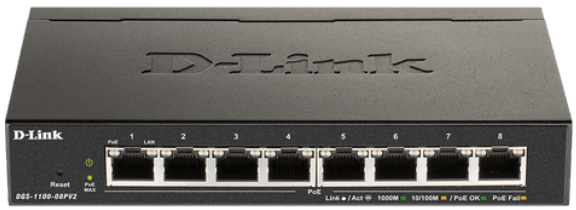

102.90€

Kaina su PVM

Be PVM: **85.04€**

In Stock

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 8 x 10/100/1000BASE-T PoE ports
- ✓ Supports IEEE 802.3at PoE
- ✓ 64W PoE power budget
- ✓ Compact design for convenient placement
- ✓ Fanless design for silent operation
- ✓ Innovative D-Link Green energy saving features
- ✓ Complete web interface for comprehensive switch management



Aprašymas

Powerful and flexible networking solution for small, medium, and enterprise businesses.

Simple. Easy. Smart

WebUI Web UI

Easy to use web interface to access management features.

Static Routing VLANs

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Segment your network into VLANs.

Surveillance mode Surveillance Mode Interface

Get a snapshot of your security topology in an instant.

Advanced Security Features

The DGS-1100 series’ web user interface gives administrators an easy way to manage Layer 2 features, such as VLANs, Spanning Tree Protocol (STP), and link aggregation (desktop models utilize Static Trunk). With powerful security features including IGMP snooping, Static MAC, and Storm Control, these smart managed switches are a versatile solution for deployments that require easy to configure functionality without added complexities.

Simplify Network Management

D-Link’s free Network Assistant (DNA) utility displays all your connected devices and makes first-time configuration a breeze. The free D-View 7 Network Management System comes with a license for 25 nodes and 2 probes and full access to the management tools.

Full PoE Support

The DGS-1100-08PV2 supports IEEE 802.3af/at Power over Ethernet on all eight copper access ports. Power over Ethernet greatly simplifies the installation of PoE-enabled devices such as VoIP phones and IP cameras in remote locations with no immediate access to a power outlet. Each individual port has capacity to support up to 30W of PoE power, while the switch has an overall budget of 64W.

Easy Troubleshooting

The DGS-1100 Series features Loopback Detection and Cable Diagnostics to help network administrators find and solve network problems quickly and easily.
Loopback Detection detects loops created by a specific port and automatically shuts down the affected port. The Cable Diagnostics feature is designed for network administrators to quickly examine the quality of the copper cables, recognize the cable type, and detect cable errors.

Green Technology

D-Link Green technology enables the DGS-1100 Smart Managed Switches to save power without sacrificing performance. The desktop models in the series utilize a fanless design, for silent and energy-efficient operation. All models are also IEEE 802.3az-compliant and feature Link Status detection.

Techninė specifikacija

Management features	
Switch type	Managed
Switch layer	L2/L3
Quality of Service (QoS) support	Yes
Web-based management	Yes
Ports & interfaces	
Basic switching RJ-45 Ethernet ports quantity	8
Basic switching RJ-45 Ethernet ports type	Gigabit Ethernet (10/100/1000)
Installed SFP modules quantity	0

Installed SFP+ modules quantity	0
Gigabit Ethernet (copper) ports quantity	8
Network	
Networking standards	IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u
10G support	No
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T
Port mirroring	Yes
Full duplex	Yes
Half duplex	Yes
Flow control support	Yes
Link aggregation	Yes
Broadcast storm control	Yes
Auto MDI/MDI-X	Yes
Ethernet LAN data rates	10,100,1000 Mbit/s
VLAN support	Yes
Virtual LAN features	Port-based VLAN, Tagged VLAN, Voice VLAN
Number of VLANs	4094
Data transmission	
MAC address table	4096 entries
Switching capacity	16 Gbit/s
Forwarding rate	11.9 Mpps
Number of queues	4
Jumbo frames support	Yes
Jumbo frames	9216
Security	
IGMP snooping	Yes
Loop protection	Yes
Queue scheduling algorithms	SP, Weighted Round Robin (WRR)
Multicast features	
Multicast support	Yes
Design	
Rack mounting	No
Product colour	Black
LED indicators	Yes

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Performance	
Flash memory	2 MB
Fanless	Yes
Mean time between failures (MTBF)	786841 h
Power	
Power supply included	Yes
AC input voltage	100 - 240 V
Power consumption (max)	77.9 W
Power over Ethernet (PoE)	
Power over Ethernet (PoE)	Yes
Power over Ethernet plus (PoE+) ports quantity	8
Power over Ethernet (PoE) power per port	30 W
Total Power over Ethernet (PoE) budget	64 W
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	0 - 90%
Storage relative humidity (H-H)	0 - 95%
Heat dissipation	265.85 BTU/h
Weight & dimensions	
Width	171 mm
Depth	97.8 mm
Height	28.6 mm
Weight	430 g
Certificates	
Compliance certificates	CE, RoHS
Certification	FCC Class B, CE Class B, VCCI Class B, BSMI cUL, CE LVD, CB, BSMI
Sustainability	
Sustainability compliance	Yes
Matmenys ir svoris	
Matmenys (I × P × A)	21.00cm × 18.00cm × 8.00cm
Svoris	1.08kg

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Dokumentai ir vaizdo įrašai

› Product leaflet

Gamintojo ir saugos informacija

MANUFACTURER

D-Link

EU RESPONSIBLE PERSON

D-Link Benelux
Postbus 48, 5480 AA Schijndel, NL
dlink.com

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt