
Intellinet Fast Ethernet Media Converter, 10/100Base-Tx to 100Base-Fx (SC) Multi-Mode, 2 km (1.24 mi)

Gamintojas: **SONSTIGE** · Modelis: **506502** · EAN: **766623506502** · Prekės kodas: **941608**

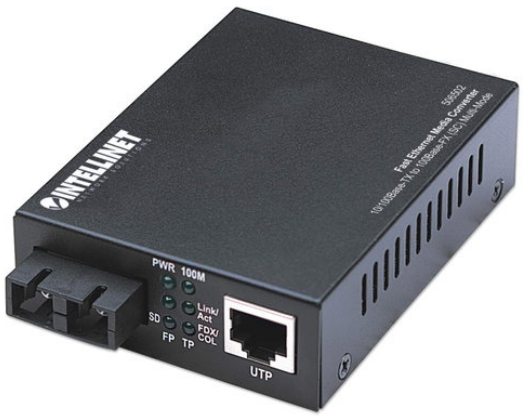

52,90 €

Kaina su PVM

Be PVM: **43,72 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Data transfer rate: 100 Mbps
- ✓ One 10/100Base-TX RJ45 port, maximum distance 100 m / 300 ft.
- ✓ RJ45 port with Auto MDI/MDI-X support and auto-negotiation
- ✓ One 100Base-FX multi-mode Fibre SC duplex port
- ✓ Fibre distance support: up to 2 km / 1.24 mi (62.5/125 or 50/125 µm cable)
- ✓ Wavelength: 1310 nm
- ✓ Flow control
- ✓ Status LEDs for power and Link/TX for both ports
- ✓ External power adapter, 5 V DC
- ✓ Functions as a stand-alone converter or can be used with the 14-slot media converter chassis, model 507356











Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Aprašymas

The Intellinet Network Solutions Fast Ethernet Media Converter was specifically designed to offer the network designer a device for migration from copper-based Ethernet to Fibre Ethernet. Now migration or expansion of existing networks can be achieved with minimum cost and complexity. The converter is completely transparent to the network so the network performs exactly the way it did before - only now it can support both copper and fibre mediums.

Expands the Size of an Existing Network

Provides fibre connectivity to Ethernet segments, allowing for even further networking expansion between extended workgroups. Also provides building-to-building connectivity without the need for the cost and disruption associated with the installation of additional routers.

Enhances the Distance between Networking Devices

Connecting the converter to fibre segments can further extend distances between networking nodes. This can be achieved by direct connection between the converter and a fibre-based node or networking device.

Cabling Flexibility

Network managers can install fibre cabling anywhere within a network without changing the arrangement of copper-based Ethernet. The compact size of the converter allows it to be easily deployed in any narrow desktop location or to be used in a wall-mount installation. Several converters can be simultaneously installed into a 19"; rack-mountable chassis.

Techninė specifikacija

Network	
Maximum data transfer rate	100 Mbit/s
Networking standards	IEEE 802.3, IEEE 802.3u
Ethernet interface type	Fast Ethernet
Ethernet LAN data rates	10,100 Mbit/s
Auto MDI/MDI-X	Yes
Duplex system	Full, Half
Performance	
Maximum transfer distance	2000 m
Wavelength	1310 nm
Fiber mode structure	Multi-mode
Fiber cable diameters supported (core/cladding)	50/125,62.5/125 µm
Tx power (min)	-22 dBmW
Tx power (max)	-12 dBmW
Sensitivity	-30 dBmW
Features	
Internal	No

LED indicators	LAN, Link, Power, Status
Product colour	Black
Housing material	Metal
Ports & interfaces	
Fiber optic connector	SC
Connectivity technology	Wired
Ethernet LAN (RJ-45) ports	1
Fiber ports quantity	1
DC-in jack	Yes
Power	
Input voltage	5 V
Input current	1 A
Power consumption (max)	2.5 W
External power adapter	Yes
Weight & dimensions	
Width	70 mm
Depth	107 mm
Height	26 mm
Weight	500 g
Operational conditions	
Operating temperature (T-T)	0 - 70 °C
Storage temperature (T-T)	-45 - 80 °C
Operating relative humidity (H-H)	10 - 90%
Packaging content	
AC adapter included	Yes
Manual	Yes
Packaging data	
Package type	Box
Certificates	
Certification	FCC Class B, CE, UKCA, NDAA
Logistics data	
Harmonized System (HS) code	85176990

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Dokumentai ir vaizdo įrašai

› Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

IC Intracom Vertriebs GmbH
Löhbacher Str. 7, D-58553 Halver, DE
intellinetnetwork.eu

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt