


# PATCHBOX C60SMAOS21131Y InfiniBand/fibre optic cable 2.5 m LC OFC Yellow

Gamintojas: **PATCHBOX** · Modelis: **C60SMAOS21131Y** · EAN: **311778770157** · Prekės kodas: **945072**

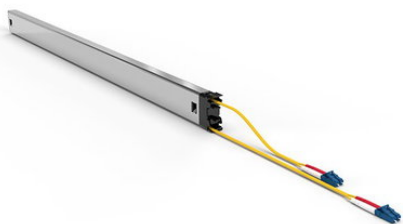

## 19,90 €

Kaina su PVM

Be PVM: **16,45 €**

**Sandėlyje**



**Prekė internetu**

Nuskenaukite kodą arba apsilankykite [www.shopro.lt](http://www.shopro.lt)

## Pagrindinės savybės

- ✓ Extendable fiber optic cables for perfect patching
- ✓ Interchangeable modular cassette system
- ✓ Cable stopper for precise adjustment of cable length
- ✓ Integrated cassette labelling
- ✓ OS2 RBS 9µ/125µ, LSZH
- ✓ Connector: LC Duplex - SC Duplex
- ✓ Cable length: 2.5m (46RU)

## Aprašymas

PATCHBOX® is the most innovative cabling system for network cabinets ever. No more cable spaghetti, as the fiber optic cables are always available in the correct length. Easy to install and reduced maintenance. Saves massive amounts of time and money. The PATCHBOX® Plus+ Long Range is suitable for up to 46RU with a cable length of 2.5m. Our RoHS conform optic cables with Corning®-fibres are one of the very best on the market. Extractable fibre optic cables for the perfect length. Cable stopper for precise cable length adjustment. Each PATCHBOX® Cassette has its own labelling option. Steel frame for up to 24 PATCHBOX® Cassettes. PATCHBOX® Patchcatch (0RU cable management) also included for free. Easy replacement of PATCHBOX® Cassettes. PATCHBOX® has been designed with speed and simplicity in mind. The installation of the PATCHBOX® and the patching of the 24 cables is on average 8 times faster than the conventional method. Likewise, the typical maintenance work (moves, adds, changes) and the replacement of a switch are even 10 times faster. In addition, the PATCHBOX® enables a higher packing density in the network cabinet compared to the conventional method. This means: More components in your network cabinet with a better overview!

## Techninė specifikacija

### Features

|              |       |
|--------------|-------|
| Cable length | 2.5 m |
|--------------|-------|

|                             |                                                                |
|-----------------------------|----------------------------------------------------------------|
| Cable type                  | OFC                                                            |
| Connector 1                 | LC                                                             |
| Connector 2                 | LC                                                             |
| Connector 1 gender          | Male                                                           |
| Connector 2 gender          | Male                                                           |
| Product colour              | Yellow                                                         |
| Jacket material             | Low smoke zero halogen (LSZH)                                  |
| Fibre optic type            | OS2                                                            |
| Connector polish type       | PC                                                             |
| Full duplex                 | Yes                                                            |
| Core diameter               | 9 µm                                                           |
| Cladding diameter           | 125 µm                                                         |
| Fiber mode structure        | Single-mode                                                    |
| Wavelengths supported       | 1310,1550 nm                                                   |
| Ethernet interface type     | 10 Gigabit Ethernet, 40 Gigabit Ethernet, 100 Gigabit Ethernet |
| Data transfer rate          | 100 Gbit/s                                                     |
| Insertion loss              | 0.1 dB                                                         |
| Connector material          | Ceramic                                                        |
| Certificates                |                                                                |
| Certification               | CE                                                             |
| Operational conditions      |                                                                |
| Operating temperature (T-T) | 10 - 45 °C                                                     |
| Packaging data              |                                                                |
| Package width               | 50 mm                                                          |
| Package depth               | 690 mm                                                         |
| Package height              | 50 mm                                                          |
| Package weight              | 400 g                                                          |
| Packaging content           |                                                                |
| Quantity per pack           | 1 pc(s)                                                        |
| Other features              |                                                                |
| Material                    | Polyoxymethylene (POM), Steel                                  |
| Logistics data              |                                                                |
| Country of origin           | Hungary                                                        |

## Dokumentai ir vaizdo įrašai

- › Naudojimo instrukcija
- › Gaminio lankstinukas

## Gamintojo ir saugos informacija

GAMINTOJAS

**PATCHBOX**

PLATINTOJAS

**MB KOMPIUTERIŲ GURU**

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt