

StarTech.com USB Crash Cart Adapter with File Transfer & Video Capture - TAA

Gamintojas: **STARTECH** · Modelis: **NOTECONS02** · EAN: **065030854382** · Prekės kodas: **945479**



544,90 €

Kaina su PVM

Be PVM: **450,33 €**

Sandėlyje




Prekę internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ **LAPTOP TO SERVER:** USB crash cart adapter connects your laptop to a headless system, turning your laptop into a portable console for rack servers in your server room, PCs, ATMs, kiosks, etc
- ✓ **EFFICIENT TROUBLESHOOTING:** Easily transfer files, capture screenshots, and log activity using the crash cart adapter software; For optimal performance, install the latest drivers making sure to download the drivers specifically for the NOTECONS02
- ✓ **SELF-POWERED:** The KVM adapter is powered by the server-side USB connection, reducing strain on the laptop's battery and eliminating the need for an AC outlet, allowing you to connect to any PC or device with a VGA output port and USB connection
- ✓ **COMPACT DESIGN:** This TAA Compliant pocket-sized data center crash cart adapter requires no additional accessories, eliminating the need to carry around a traditional crash cart/trolley when troubleshooting and servicing your systems
- ✓ **BIOS-LEVEL CONTROL:** Connect the crash cart adapter to your laptop using the included USB cable, then connect the integrated USB & VGA cables to your server for instant BIOS-level control; Note: Mouse function may be limited in some BIOS/UEFI environments



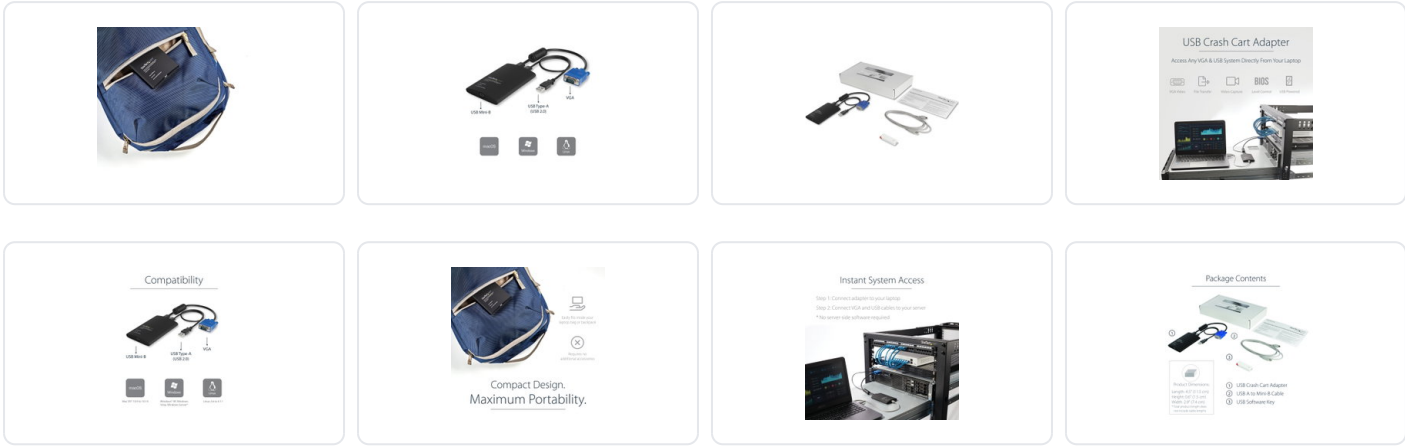

Aprašymas

Portable KVM Console | VGA Video | 1920 x 1200 60Hz | Cables Included

The USB crash cart adapter gives you control of a headless system, turning your laptop into a portable crash cart for rack servers, PCs, ATMs, kiosks, and more.

Instant System Access

Simply connect the laptop crash cart adapter to your computer using the included USB cable, then connect the integrated USB and VGA cables to your server for instant BIOS-level control. With no server-side software required, you can be up and running instantly.

*Please note that the mouse function may be limited in some BIOS/UEFI environments

Troubleshoot More Efficiently

With the flexible software interface, you can transfer files from your laptop to the server, capture videos for records or instructional purposes, take screenshots and scale the display window to full screen mode or smaller, with no scroll bars helping you to troubleshoot faster.

Self-Powered Reliability

Powered from the server-side USB connection, the KVM adapter doesn't require an AC outlet so you can connect to any PC or device that has a VGA and USB port, even if there's no power outlet available.

Take It Anywhere

This pocket-sized adapter features a compact design that easily fits inside your laptop bag and requires no additional accessories to connect, eliminating the need to lug around a large, awkward traditional crash cart to troubleshoot and service your systems.

StarTech.com offers a wide selection of high-quality KVM-related products to help you access your systems more efficiently without the expense and clutter of extra keyboards, mice and monitors.

Techninė specifikacija

Ports & interfaces	
Number of computers controlled	1
Keyboard port type	USB

Mouse port type	USB
Video port type	VGA
Console USB ports quantity	1
USB connector type	Mini-USB B
Audio connections	No

Performance

HD type	Full HD
Maximum resolution	1920 x 1200 pixels
Video bandwidth	60 Hz
Plug and Play	Yes
Daisy chain	No
Number of users	1 user(s)

Design

Rack mounting	No
Product colour	Black
Housing material	Plastic
Cable length	0.416 m
LED indicators	Yes
Mean time between failures (MTBF)	909000 h
Certification	CE, FCC, TAA, UL

Display

Built-in display	No
On Screen Display (OSD)	No

Power

Power source	USB
--------------	-----

System requirements

Windows operating systems supported	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 11, Windows 11 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Linux operating systems supported	Yes
Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.9 Mavericks, Mac OS X 11.0 Big Sur, Mac OS X 13.0 Ventura
Server operating systems supported	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Sustainability	
Compliance certificates	RoHS
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	0 - 80%
Weight & dimensions	
Width	74 mm
Depth	115 mm
Height	15 mm
Weight	170 g
Packaging data	
Package width	165 mm
Package depth	301 mm
Package height	55 mm
Package weight	363 g
Packaging content	
Cables included	USB
Software included	Yes

Other features

Compatible operating systems Windows 8 (32/64bit), 7 (32/64), Vista(32/64), XP(32/64) Windows Server 2012, 2008 R2 Mac OS 10.x (Tested up to 10.9) Linux 2.6.x - 3.5.x (32/64bit)

Logistics data

Harmonized System (HS) code 85176200

Master (outer) case width 532 mm

Master (outer) case length 321 mm

Master (outer) case height 530 mm

Products per master (outer) case 30 pc(s)

Matmenys ir svoris

Matmenys (l × p × A) 30,00cm × 17,00cm × 5,00cm

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)
- › [Vaizdo įrašas](#) youtube.com/watch?v=Xwz0dNxvQMA

Gamintojo ir saugos informacija

GAMINTOJAS

StarTech.com Ltd.

Artisans Crescent 45, N5V 5E9 Ontario, London,
CA

startech.com

ATSAKINGAS ASMUO ES

StarTech.com Limited

Laarderhoogtweg 25, 1101 EB Amsterdam, NL
startech.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt