
LogiLink CC5112S networking cable Grey 20 m Cat6a S/FTP (S-STP) Round

Gamintojas: **LOGILINK** · Modelis: **CC5112S** · EAN: **4052792064070** · Prekės kodas: **950739**

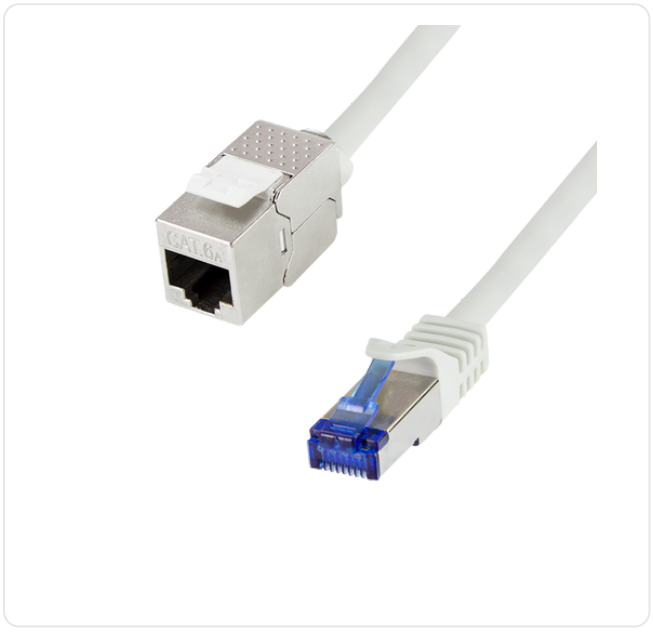

23.90€

Kaina su PVM

Be PVM: **19.75€**

In Stock

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Cat.6A CP-Link or extention cable
- ✓ Cat.6A Class EA bis 500 MHz, 10 Gbit/s
- ✓ According to ISO/IEC 11801, EN 50173, ANSI/TIA-568C.2
- ✓ Suitable for PoE, PoE+, PoE++
- ✓ Cable: 26/7AWG BC S/FTP LSZH, Eca
- ✓ Connection: RJ45 plug to RJ45 keystone jack, shielded
- ✓ For the connection of consolidation point distributors
- ✓ Suitable for NP0090/91/92/93/94, NK4020/21/26/27
- ✓ Sheath: LSZH / IEC 60332-1-2, RAL 7035 light gray







Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Aprašymas

Consolidation point patch cable, Cat.6A, S/FTP, grey, 20 m" from LogiLink Professional

LogiLink's new consolidation point cables (CP cables) are perfect for flexible floor distribution, especially if used together with LogiLink's consolidation point boxes (CP boxes). Consolidation points (CPs) are stationary distribution points in false ceilings, underfloor systems or cable ducts. They used as additional flexible connections between the patch panels and the junction boxes. This means that the office cabling can be adapted much more efficiently and flexibly to local needs.

Techninė specifikacija

Features	
Cable length	20 m
Cable standard	Cat6a
Cable shielding	S/FTP (S-STP)
Connector 1	RJ-45
Connector 2	RJ-45
Product colour	Grey
Connector 1 gender	Male
Connector 2 gender	Female
Cable shape	Round
Jacket material	Low smoke zero halogen (LSZH)
Cabling technology	10GBase-T
Ethernet interface type	10 Gigabit Ethernet
AWG wire size	26/7
Frequency	500 MHz
Plug and Play	Yes
Sustainability	
Doesn't contain	Halogen
Certificates	
Compliance certificates	RoHS
Certification	ISO/IEC 11801, EN 50173, ANSI/TIA-568C.2
Weight & dimensions	
Width	14.7 mm
Height	21.5 mm
Weight	630 g
Packaging content	

Quantity per pack	1 pc(s)
Packaging data	
Package width	250 mm
Package depth	65 mm
Package height	300 mm
Package weight	706 g
Technical details	
Sustainability compliance	Yes

Dokumentai ir vaizdo įrašai

› Product leaflet

Gamintojo ir saugos informacija

MANUFACTURER

2direct GmbH
Langenstück 5, 58579 Schalksmühle, DE
info@2direct.de
2direct.de

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt