
Vertiv Avocent 4-Port ACS800 Serial Console with analog modem, external AC/DC Power Brick - Jumper cord: Plug C14 to connector C13

Gamintojas: **VERTIV** · Modelis: **ACS804MEAC-404** · EAN: **7612205057494** · Prekės kodas: **953668**

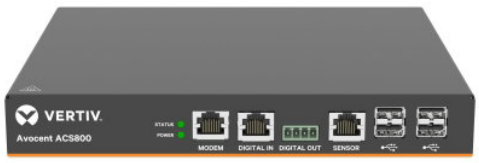

1 015,90 €

Kaina su PVM

Be PVM: **839,59 €**

Sandėlyje

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Secure in-band and out-of-band network remote management
- ✓ Fast, automated configuration with Zero Touch Provisioning
- ✓ Access and troubleshoot remote locations using automatic network failover to cellular (and failback)
- ✓ Automatic pin-out detection for both Cyclades and Cisco pinouts using straight through cables
- ✓ Compliance with data center access and security policies – customizable, multiple access levels

Aprašymas

The Vertiv Avocent ACS 800 serial console system takes our renowned enterprise class technologies utilized in data centers around the world and packages the key features into an exciting compact and cost effective form factor. Providing serial access, environmental monitoring, IoT integration and remote networking capability to the Edge oriented market sectors of financial institutions, retail chains, education and others.\n\nRegional IT managers and facility engineers will benefit with the ability to perform secure, remote management and out-of-band management of IT assets from anywhere in the world. Featuring a dual-core ARM processor architecture with expanded memory capabilities, RS232/RS485/RS422 serial access, USB, Gigabit Ethernet and environmental sensor access, the Yochto project based Linux operating system and available DSView™ management software, provides the Avocent ACS 800 optimal performance, security, reliability for a complete out-of-band management solution.\n\n- Support for Liebert GXT4 UPS systems and Rack PDUs from Vertiv, ServerTech, APC, Raritan and Eaton\n- 4 USB ports to support new IT equipment and external devices\n- Console event logging and notification, including “last gasp” capture\n- Regulatory compliance and easy troubleshooting – online and off-line data logging with time stamps\n- Strong dial-up and secure dial-back using optional built-in modem\n- Environmental sensor port to connect temperature, humidity, differential pressure, leak, door pin sensors (up to 8 can be daisy chained)

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Techninė specifikacija

Technical details	
Rack mounting	Yes
Internal modem	Yes
Zero Touch Provisioning (ZTP)	Yes
Web-based management	Yes
Temperature sensor	Yes
Product colour	Black
Event logging	Yes
Management features	
Management protocols	CLI, HTTP/HTTPS, SNMP
Security	
Authentication method	LOCAL, RADIUS, LDAP, TACACS+ and ONE TIME PASSWORD(OTP)
Security algorithms	3DES, 128-bit AES, 192-bit AES, 256-bit AES, FIPS 140-2, HTTPS, IPSec, SHA-256, SNMP, SNMPv3, SSH, SSH-2
IP address filtering	Yes
One-time password (OTP)	Yes
RSA SecurID	Yes
Ports & interfaces	
Console port	RJ-45
Serial ports quantity	4
USB 2.0 ports quantity	4
Ethernet LAN (RJ-45) ports	2
Software	
Operating system installed	Embedded LINUX
Weight & dimensions	
Dimensions (WxDxH)	212.6 x 181.9 x 29.5 mm
Weight	1.09 kg
Power	
Power source type	AC, DC
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Power consumption (typical)	7 W
Power consumption (max)	28 W

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

DC input voltage	12 V
Number of power supply units	1
Operational conditions	
Operating temperature (T-T)	0 - 70 °C
Storage temperature (T-T)	-20 - 90 °C
Operating relative humidity (H-H)	20 - 80%
Storage relative humidity (H-H)	5 - 95%
Certificates	
Certification	FCC Class A, CE Class A (EU), ICES-003 (Canada), VCCI (Japan), RCM (Australia), Customs Union (CU), KCC (Korea)
Memory	
Flash memory	16000 MB
Card reader integrated	No
RAM capacity	1024 MB
RAM type	DDR3L
eMMC capacity	16 GB
Processor	
Processor family	ARM Cortex-A9
Processor architecture	ARM Cortex-A9
Processor cores	2
Processor frequency	667 MHz
Network	
Copper ethernet cabling technology	10BASE-T, 100BASE-T, 1000BASE-T
IP forwarding support	Yes
Supported network protocols	IPv6
Cable types supported	Cat5, Cat5e, Cat6, Cat6+, Cat6a, Cat6e, Cat7, Fiber
Other features	
Safety	UL (USA), cUL (CANADA), EN-60950 (EU), CB, Customs Union (CU)

Dokumentai ir vaizdo įrašai

› Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

Vertiv

ATSAKINGAS ASMUO ES

Vertiv GmbH
August-Everding-Str 25, 81671 München, DE
vertiv.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt