


Equip Cat.6A U/UTP Patch Cable, 20m, White

Gamintojas: **EQUIP** · Modelis: **603009** · EAN: **4015867206645** · Prekės kodas: **955700**

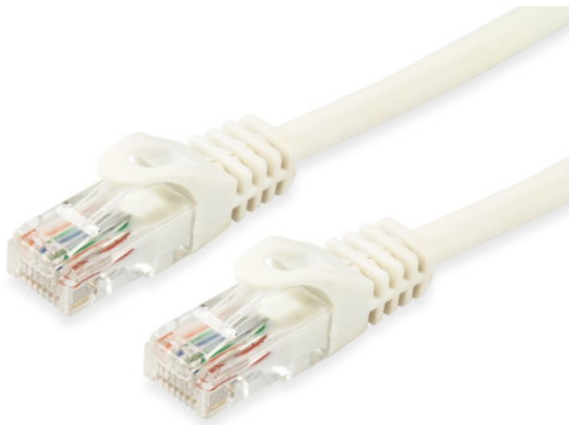

25,89 €

Kaina su PVM

Be PVM: **21,40 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 4 x 2 AWG 26/7
- ✓ Unshielded
- ✓ 500MHz performance Bandwidth
- ✓ Transmission: 10Gbit
- ✓ Suitable for PoE, PoE+
- ✓ Stranded bare copper conductor
- ✓ Molded boot with Strain relief
- ✓ RoHS compliant
- ✓ Low Smoke Zero Halogen (LSZH/LSOH)
- ✓ Compliant with ISO/IEC 11801 and EN 50173



Aprašymas

The equip® Cat.6A U/UTP Patch Cord is composed of preeminent materials and fully-examined to conform with industrial standards. Offering higher bandwidth and better signal-to-noise margin, the Cat.6A cable is able to deliver ultrahigh and error-free performance in the most demanding network environments, specially for 10G application.

Techninė specifikacija

Features

Cable length	20 m
--------------	------

Cable standard	Cat6a
Cable shielding	U/UTP (UTP)
Connector 1	RJ-45
Connector 2	RJ-45
Product colour	White
Connector 1 gender	Male
Connector 2 gender	Male
Connector 1 form factor	Straight
Connector 2 form factor	Straight
Connector contacts plating	Gold
Jacket material	Low smoke zero halogen (LSZH)
Cable shape	Round
Conductor type	Stranded
Conductor material	Copper
Cabling technology	10GBase-T
Ethernet interface type	10 Gigabit Ethernet, Gigabit Ethernet
AWG wire size	26/7
Frequency	500 MHz
Power over Ethernet (PoE)	Yes
Power over Ethernet (PoE) type supported	PoE+
Molded cable boot	Yes
Plug and Play	Yes
Country of origin	China
Sustainability	
Doesn't contain	Halogen
Certificates	
Compliance certificates	RoHS, CE, REACH
Weight & dimensions	
Width	10.7 mm
Depth	11.7 mm
Height	20000 mm
Insulation thickness	0.35 mm
Outer diameter	5.5 mm
Weight	625 g

Packaging content	
Quantity per pack	1 pc(s)
Packaging data	
Package width	250 mm
Package depth	50 mm
Package height	290 mm
Package weight	650 g
Package type	Polybag
Other features	
Insulation outer diameter	1.05 mm
Logistics data	
Harmonized System (HS) code	84733080
Master (outer) case width	300 mm
Master (outer) case length	300 mm
Master (outer) case gross weight	13 kg
Master (outer) case height	400 mm
Products per master (outer) case	20 pc(s)
Technical details	
Sustainability compliance	Yes

Dokumentai ir vaizdo įrašai

- › Gaminio lankstinukas
- › CE ženklimas

Gamintojo ir saugos informacija

GAMINTOJAS

Digital Data Communications GmbH
Im Defdahl 10 F, D-44141 Dortmund, DE
digital-data.de

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt

Saugos dokumentai

- › CE ženklimas