


StarTech.com 10 Pack Cisco GLC-SX-MM Compatible SFP Module (10 Pack) - 1000BASE-SX - 1GbE Multimode Fiber MMF Optic Transceiver - 1GE Gigabit Ethernet SFP - LC 550m - 850nm - DDM Cisco IE3200, IE3300, ME1200

Gamintojas: **STARTECH** · Modelis: **GLCSXMM10PST** · EAN: **065030864312** · Prekės kodas: **959303**

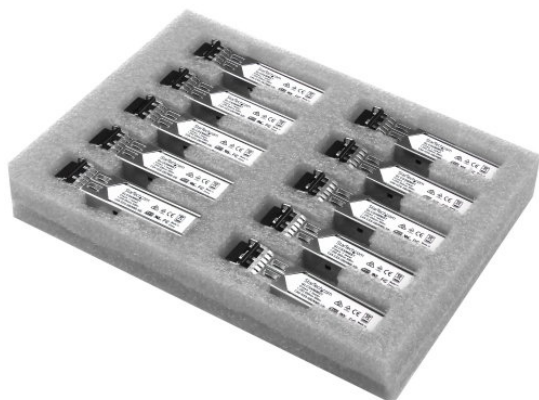

339,90 €

Kaina su PVM

Be PVM: **280,91 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ **100% CISCO GLC-SX-MM COMPATIBLE:** Works with Cisco switches like IE3200, IE3300, ME1200, ME2400, N9300 and others
- ✓ **WORKS WITH MSA COMPLIANT SWITCHES:** Also works with switch models from Ubiquiti, D-Link, Netgear, Supermicro, TP-Link and more that accept uncoded modules
- ✓ **TECHNICAL SPECS:** 1000BASE-SX / 1 Gbps / Multi Mode (MMF) / LC Connector / 850nm / Distances up to 550m (1804ft)
- ✓ **TESTED FOR OEM HOST COMPATIBILITY:** Hot-swappable in Cisco routers and switches; DDM support reports the transceiver's status to most SNMP network management tools
- ✓ **THE IT PRO'S CHOICE:** Designed and built for IT Professionals, this SFP module is backed for life (lifetime of module, not network switch), including free lifetime 24/5 multi-lingual technical assistance.



Aprašymas

1000 Mbps (1 Gbps) | Multi Mode Fiber | LC | 550 m (1804 ft) | Lifetime Warranty

The GLCSXMM10PST is a ten-pack of our Cisco GLC-SX-MM compatible fiber transceiver module that has been designed, programmed and tested to work with Cisco® brand switches and routers. It delivers dependable 1 GbE connectivity over fiber cable, for 1000BASE-SX compliant networks, with a maximum distance of up to 550 m (1804 ft).

Technical Specifications:

- Wavelength: 850 nm
- Maximum Data Transfer Rate: 1.25 Gbps
- Type: Multi Mode Fiber
- Connection Type: LC Connector
- Maximum Transfer Distance: 550 m (1804 ft)
- MTBF: 3,381,761 hours
- Power Consumption: Less than 1 Watt
- Digital Diagnostics Monitoring (DDM): No

This SFP fiber module is hot-swappable, making upgrades and replacements seamless by minimizing network disruptions.

StarTech.com SFPs

All StarTech.com SFP & SFP+ transceiver modules are backed by a lifetime warranty and free lifetime multilingual technical support. StarTech.com offers a wide variety of SFP modules and direct-attach SFP cables, providing the convenience and reliability you need to ensure dependable network performance.

Techninė specifikacija

Performance	
SFP transceiver type	Fiber optic
Maximum data transfer rate	1250 Mbit/s
Interface type	SFP
Multi-mode fiber (MMF) supported	Yes
Fiber optic connector	LC
SFP transceiver standard	SX
Maximum transfer distance	550 m
Wavelength	850 nm
Networking standards	IEEE 802.3z
Duplex system	Full, Half
Digital Diagnostics Monitoring (DDM)	No
Wavelength-division multiplexing (WDM)	No
Fiber ports quantity	1
Features	

Product colour	Silver
Housing material	Zinc steel
Hot-swap	Yes
Mean time between failures (MTBF)	3381761 h
Power	
Power consumption (typical)	1 W
Certificates	
Compliance certificates	CE, RoHS
Operational conditions	
Operating temperature (T-T)	0 - 70 °C
Storage temperature (T-T)	-40 - 85 °C
Operating relative humidity (H-H)	5 - 95%
Weight & dimensions	
Width	13 mm
Depth	57 mm
Height	12 mm
Weight	16 g
Packaging content	
Quantity per pack	10 pc(s)
Packaging data	
Package width	121 mm
Package depth	202 mm
Package height	36 mm
Package weight	214 g
Logistics data	
Master (outer) case width	348 mm
Master (outer) case length	417 mm
Harmonized System (HS) code	85369010
Master (outer) case height	355 mm
Products per master (outer) case	50 pc(s)

Dokumentai ir vaizdo įrašai

› [Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

StarTech.com Ltd.

Artisans Crescent 45, N5V 5E9 Ontario, London,
CA

startech.com

ATSAKINGAS ASMUO ES

StarTech.com Limited

Laarderhoogtweg 25, 1101 EB Amsterdam, NL
startech.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt