
ACT Field termination plug RJ45 CAT6A shielded, toolless, 4PPoE 100W

Gamintojas: **ACT** · Modelis: **TD168F** · EAN: **8716065534900** · Prekės kodas: **964424**

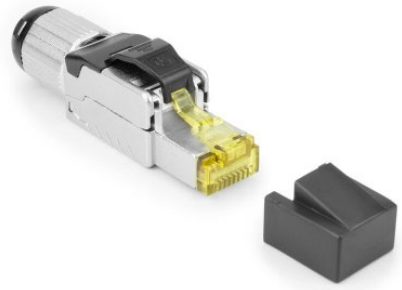

19,90 €

Kaina su PVM

Be PVM: **16,45 €**

Sandėlyje


Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ RJ45 field assembly plug shielded CAT6A for toolless installation suited for 10Gbps ethernet applications
- ✓ Screwable strain relief; for solid and stranded wires with AWG 23-26 and an outer jacket diameter of 6-7.5mm
- ✓ IDC connector: optimal connection for 4PPoE 100W (type 4)
- ✓ Installation without tools (LSA)
- ✓ Copper strip included for optimal shielding; 50µ gold-plated contacts; dust cover
- ✓ Colour-coded for T568A and T568B wiring schemes









Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Aprašymas

DESCRIPTION

Use the ACT CAT6A RJ45 Field Termination Plug for a quick and easy installation of a RJ45 connector on a solid or stranded cable with AWG 23-26 wires and an outer jacket diameter of 6-7.5mm. This toolless LSA assembly plug is suited for 10Gbps ethernet applications and provides an optimal connection for 4PPoE 100W.

Field termination plug for toolless installation

The ACT TD168F is suited for toolless LSA installation via its Insulation Displacement Contacts (IDC). These connectors ensure toolless easy installation just by pressing/closing the LSA clamp. The plug is suited for 4PPoE 100W (type 4) applications.

Screwable strain relief

The field termination plug comes with a screwable strain relief to protect the wires from tension and stress. The field installation plug is suited for solid or stranded cables with AWG 23-26 wires and an outer jacket diameter of 6-7.5mm.

Additional features

The plug has 50µ gold-plated contacts and comes with an adhesive copper foil tape for better shielding. Additionally, a dust cover is enclosed to protect the plug. The colour-coded T568A and T568B wiring schemes ensure easy assembly.

Techninė specifikacija

Features	
Connector(s)	RJ-45
Product colour	Black, Stainless steel
Connector gender	Male
Connector form factor	Straight
Material	Nickel, Zinc
AWG wire size	23/26
Connector contacts plating	Gold
Withdrawal force	77 N
Certification	ANSI/TIA-568.2-D
Operational conditions	
Operating temperature (T-T)	-10 - 60 °C
Storage temperature (T-T)	-40 - 70 °C
Weight & dimensions	
Outer diameter	7.5 mm
Packaging data	
Quantity per pack	1 pc(s)

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Dokumentai ir vaizdo įrašai

› Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

Intronics BV
Koolhovenstraat 1E, 3772 MT Barneveld, NL
intronics.nl

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt