ACT Powercord C19 IEC Lock - C20 IEC Lock Dual Locking blue 2 m, PC3638

Gamintojas: **ACT** · Modelis: **PL0032** · EAN: **8716065552867** · Prekės kodas: **965228**

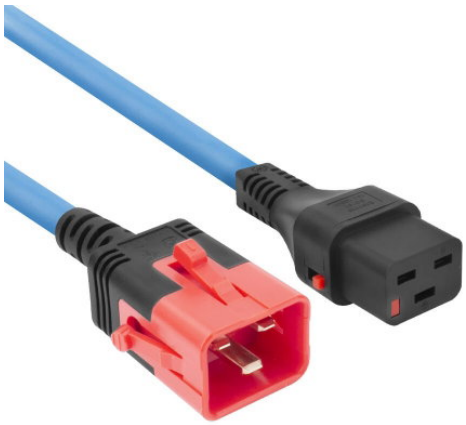

30,90 €

Kaina su PVM

Be PVM: **25,54 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Connectors: C19 IEC Lock - C20 Dual locking IEC Lock
- ✓ Protects against accidental disconnection in critical equipment, PDUs, servers, network equipment, etc
- ✓ Suitable for all PDUs; PDU doesn't need a locking mechanism of its own
- ✓ PDU side locks at the top and side
- ✓ Minimizes risks of damage and downtime
- ✓ Maximum load: 16A/250V~

Aprašymas

DESCRIPTION

The ACT IEC Dual Lock power cable offers locking at both ends: C19 IEC Lock on one side and the C20 IEC Lock Dual Locking connector on the PDU side. The C20 connector locks at the top and side, providing additional protection against accidental disconnection from the PDU. The locking mechanism is universal and works with all major PDU brands. The PDU doesn’t need to have its own locking mechanism and no tools are required. The IEC Lock prevents accidental disconnection/release of the cable from both the equipment and the PDU. This minimizes the risk of damage and downtime. The power cables are available in a range of colors for easy identification. The ACT IEC Lock can be used in Europe, Australia

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

(16A/250V~), USA, Canada and Japan (20A/120V~).

Techninė specifikacija

Features	
Product colour	Blue
Connector 1 gender	Female
Connector 2 gender	Male
Cable length	2 m
Connector 1	C19 coupler
Connector 2	C20 coupler
Connector 1 standard	IEC 60320
Connector 2 standard	IEC 60320
Connector 1 form factor	Straight
Connector 2 form factor	Straight
Connector 1 lockable	Yes
Connector 2 lockable	Yes
Suitable for use in country/location	Australia, Canada, Europe, Japan, United States
Jacket material	Polyvinyl chloride (PVC)
Conductor material	Copper
AWG wire size	15
Conductor cross section	1.5 mm²
Power	
Input voltage	250 V
Input current	16 A
Operational conditions	
Operating temperature (T-T)	-20 - 50 °C
Certificates	
Certification	CE, CSA, ENEC 05, UL, VDE
Weight & dimensions	
Diameter	9 mm

Dokumentai ir vaizdo įrašai

› Gaminio lankstinukas

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Gamintojo ir saugos informacija

GAMINTOJAS

Intronics BV
Koolhovenstraat 1E, 3772 MT Barneveld, NL
intronics.nl

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt