


# ACT Powercord C20 - C21 IEC60320 blue 3 m

Gamintojas: **ACT** · Modelis: **AK5369** · EAN: **8716065583700** · Prekės kodas: **965407**

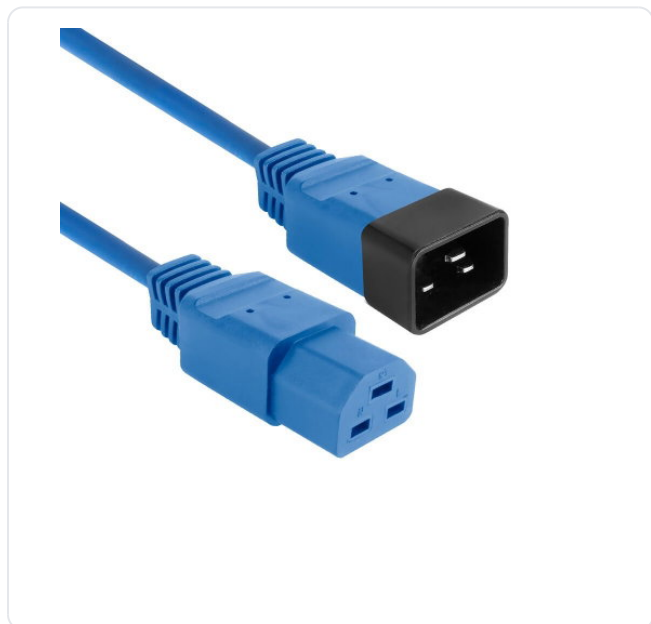

## 22,91 €

Kaina su PVM

Be PVM: **18,93 €**

**Sandėlyje**





**Prekė internetu**

Nuskenaukite kodą arba apsilankykite [www.shopro.lt](http://www.shopro.lt)

## Pagrindinės savybės

- ✓ Cable length: 3 m
- ✓ Connectors: C20 - C21 IEC60320
- ✓ The C21 connector is high temperature resistant up to 155°C
- ✓ Maximum load: 250V~/16A
- ✓ Colour: blue
- ✓ Suitable for servers, network switches; e.g. HP and Cisco



## Aprašymas

The C20 to C21 powercord is used for powering high power equipment, such as servers from the most common used brands. The C21 connector is high temperature resistant up to 155°.

ACT provides many types of power cables: CEE 7/7, Euro, UK, USA, Italian, Danish, Swiss and South African cables. ACT supplies powercables with the following connectors: CEE 7/7, IEC60320 C5, C7, C13, C14, C15, C19, C20, C21 and IEC60309 CEE1. ACT offers different types of power split cables and power cables in the following colors: black, white, red, blue, green and yellow.

## Techninė specifikacija

### Features

Product colour

Blue

|                             |                          |
|-----------------------------|--------------------------|
| Connector 1 gender          | Male                     |
| Connector 2 gender          | Female                   |
| Cable length                | 3 m                      |
| Connector 1                 | C20 coupler              |
| Connector 2                 | C21 coupler              |
| Connector 1 standard        | IEC 60320                |
| Connector 2 standard        | IEC 60320                |
| Connector 1 form factor     | Straight                 |
| Connector 2 form factor     | Straight                 |
| Jacket material             | Polyvinyl chloride (PVC) |
| Conductor material          | Copper                   |
| Number of conductors        | 3                        |
| Conductor cross section     | 2.5 mm²                  |
| Power                       |                          |
| Input voltage               | 250 V                    |
| Input current               | 16 A                     |
| Operational conditions      |                          |
| Operating temperature (T-T) | 0 - 70 °C                |
| Certificates                |                          |
| Compliance certificates     | CE                       |
| Packaging data              |                          |
| Quantity per pack           | 1 pc(s)                  |

## Gamintojo ir saugos informacija

### GAMINTOJAS

#### Intronics BV

Koolhovenstraat 1E, 3772 MT Barneveld, NL

[intronics.nl](https://intronics.nl)

### PLATINTOJAS

#### MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

[info@shopro.lt](mailto:info@shopro.lt)