
APC SMTL1500RMI3UC nepertraukiamo maitinimo resursai (UPS) „Line-Interactive“ 1,5 kVA 1350 W 6 AC išvestis(ys / čių)

Gamintojas: **APC BY SCHNEIDER ELECTRIC** · Modelis: **SMTL1500RMI3UC** · EAN: **731304402619** · Prekės kodas: **974104**

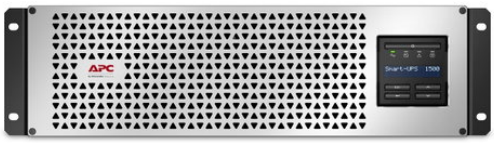

2 553,90 €

Kaina su PVM

Be PVM: **2 110,66 €**

Sandėlyje


Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt


Pagrindinės savybės

- ✓ „Line-Interactive“
- ✓ 1,5 kVA 1350 W
- ✓ Signalų forma: Sinusas
- ✓ 6 AC išvestis(ys / čių)
- ✓ Ličio-jonų (Li-Ion)
- ✓ Stelažas Pilka













Aprašymas

Stay always online and prevent data loss

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

As soon as the power fails, an APC Smart-UPS immediately supplies emergency power to all connected equipment. Because an APC UPS does this automatically, you prevent unwanted failure of, for example, a PC, server or switch. With the free APC PowerChute software, you can even have critical IT hardware shut down automatically and in a controlled manner when the UPS battery is almost empty. This prevents data loss, downtime and physical damage to hardware.

Safety

In addition, a Smart-UPS protects connected devices against peak voltage caused by lightning, among other things. This APC emergency power supply is ideally suited for (small) business use.

Lithium-Ion

The APC SMTL1500RMI3UC uses a Li-Ion (LiFePO4) battery, which provides unique advantages:

- Longer lifespan. A Li-Ion battery can last up to 10 years and therefore makes the UPS truly maintenance-free.

- Can handle more than 10x as many charge cycles as a lead acid battery (VRLA).
- Smaller and lighter. Li-Ion batteries are smaller and weigh approximately 65% less than VRLA batteries, which saves space and simplifies installation.
- Better battery performance than VRLA at ambient temperatures above 25° C. With VRLA, this is at the expense of battery life (>5% decrease per degree increase).
- 5-year factory warranty. Standard long warranty on the UPS including the battery.
- Eliminate the costs of interim battery replacement; labor, material, shipping and recycling.
- Lower TCO: The above advantages reduce the total costs over the entire life of the UPS by up to 47% (compared to a UPS with VRLA battery.)
- Faster charging means full protection sooner.
- Perfect for tight spaces, due to the limited depth of the UPS it fits easily in wall racks and small cabinets.

SmartConnect

Out-of-box remote UPS monitoring, free for a 6-month trial period. Using the SmartConnect Ethernet port, you can easily connect the Smart-UPS to your network and monitor it remotely via the secure APC SmartConnect cloud-based web portal*. In addition, the UPS can always be monitored via this port via EcoStruxure IT Expert (SFTWES1-DIGI).

* Extend access to SmartConnect via the following licenses:
1 year Standard Plan: ERWPMON1-1Y-DIGI
3 year Standard Plan: ERWPMON1-3Y-DIGI

1 year Advanced Plan: ERWPLUS1-1Y-DIGI
3 year Advanced Plan: ERWPLUS1-3Y-DIGI

Network Management Card

If you connect the UPS directly to your network via the optional APC Network Management Card (AP9640/AP9641), it can be easily managed remotely via SNMP or our remote management software Ecostruxure IT Expert (SFTWES1-DIGI). You can also automatically send a shutdown signal via the network to multiple physical and/or virtual servers. By means of the APC PowerChute Network Shutdown Software belonging to the network card, the shutdown moment and the order in which this happens can even be differentiated.

Ease of use

By means of physical buttons and an LCD screen it is possible to set and read the basic functionalities.

Battery life

You can easily read the expected battery life in the runtime graph, which you can find between the product images. This way you can easily see how long the UPS will supply emergency power at a certain load.

Mounting

The UPS is equipped with mounting brackets with which you can easily mount it to the front posts in a 19 inch rack, wall or patch cabinet due to its limited depth. By means of the optional SMTL3USF stabilization feet, the UPS can also be placed vertically, i.e. upright.

This APC Smart-UPS is designed for IT professionals or network administrators to maintain business uptime and continuity. The 1500VA line interactive 3U short depth rackmount UPS provides pure sine wave power to support critical electronics during power disruptions. It comes with IEC 320 C14 input and 6x IEC 320 C13 outlets. It offers cloud-based remote power monitoring, UPS firmware upgrades, remote diagnostics and proactive email notifications with recommended actions. It has a SmartSlot for optional Network Management Card that enables graceful shutdown of physical servers, virtual machines & HCI Clusters via PowerChute Network Shutdown. The UPS can connect to EcoStruxure IT or third-party centralized management platforms. It provides surge protection against lightning strikes, power sags, brownouts and surges. The SMTL UPS has a 5-year warranty on the UPS and Lithium-ion battery.

Techninė specifikacija

Savybės	
UPS topologija	„Line-Interactive“
Išvesties galia (VA)	1,5 kVA
Išvesties galia	1350 W
Signalų forma	Sinusas
Įvesties eksploatacinė įtampa (min.)	151 V
Įvesties eksploatacinė įtampa (maks.)	302 V
Įėjimo dažnis	50/60 Hz
Išvesties darbinė įtampa (min.)	220 V
Išvesties darbinė įtampa (maks.)	240 V
Išvesties dažnis	50/60 Hz
Viršįtampio energijos įvertinimas	680 J
Reakcijos laikas	6 ms
Išvesties įtampa THD	5%
Garso lygis	45 dB
Garsiniai perspėjimo signalai	Taip
Garsinio pavojaus signalo režimai	Signalas veikiant su akumuliatoriumi
Ryšys	
AC išėjimo tipai	C13 šakotuvas
Lizų kiekis	6 AC išvestis(ys / čių)
USB prievadas	Taip
USB prievado tipas	USB A tipo
Nuosekliosios sąsajos tipas	RJ-45

„SmartSlot“	Taip
„SmartConnect“ prievadas	Taip
Baterija	
Baterijos technologija	Ličio-jonų (Li-Ion)
Baterijos veikimo trukmė (maks.)	10 metai
Baterijos įkrovimo laikas	3 h
Konstrukcija	
Forma	Stelažas
Produkto spalva	Pilka
Rėmo pajėgumas	3U
Ekrano tipas	LCD
Tarptautinės apsaugos (IP) kodas	IP20
Aplinkos sąlygos	
Darbo temperatūros diapazonas (TT)	0 - 40 °C
Sandėliavimo temperatūros norma (T-T)	-40 - 35 °C
Darbo santykinės drėgmės diapazonas	0 - 95%
Sandėliavimo santykinis drėgmės diapazonas	0 - 95%
Darbinis aukštis	0 - 3000 m
Ne darbinis aukštis	0 - 7500 m
Sertifikatai	
Atitikties sertifikatai	RoHS
Sertifikavimas	CE, CSA, EAC, GS Mark, IEC 62040-1-1, IEC 62040-1-2, IEC 62040-2, RCM, UL 1973 REACH
Pakuotės turinys	
Pridedama valdymo kortelė	Ne
Svoris ir matmenys	
Plotis	438 mm
Ilgis	302 mm
Aukštis	131 mm
Svoris	19,5 kg
Pakuotės duomenys	
Pakuotės plotis	584 mm
Pakuotės gylis	448 mm
Pakuotės aukštis	279 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Paketo svoris	22,7 kg
Logistikos duomenys	
Gaminių skaičius ant padėklo	12 vnt
Darniosios sistemos (DS) kodas	85078000
Bendrasis anglies pėdsakas (kg of CO2e)	2052,73
Matmenys ir svoris	
Matmenys (I × P × A)	59,00cm × 45,00cm × 28,00cm

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas
- Vaizdo įrašas youtube.com/watch?v=RjdZO7VKOBk

Gamintojo ir saugos informacija

GAMINTOJAS

Schneider Electric SE
rue Joseph Monier 35, 92500 Rueil Malmaison, FR
se.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt