
ASUS ROG STRIX-1000P-GAMING maitinimo blokas 1000 W 20+4 pin ATX ATX Juoda, Sidabras

Gamintojas: **ASUS** · Modelis: **90YE00W1-B0NA00** · EAN: **4711387594384** · Prekės kodas: **977152**

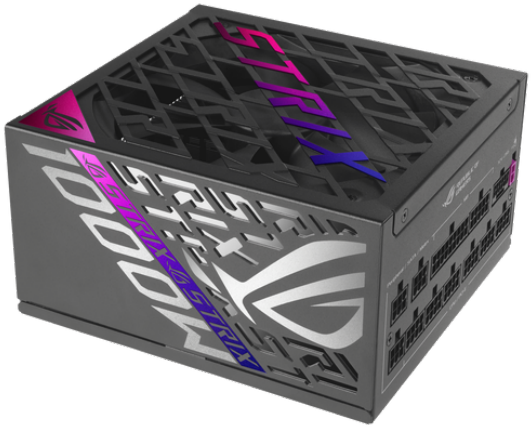

292,90 €

Kaina su PVM

Be PVM: **242,07 €**


Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 1000 W 100 - 240 V
- ✓ Motininės plokštės maitinimo jungtis: 20+4 pin ATX
- ✓ PC ATX 80 PLUS Platinum
- ✓ Semi-passive
- ✓ Juoda, Sidabras

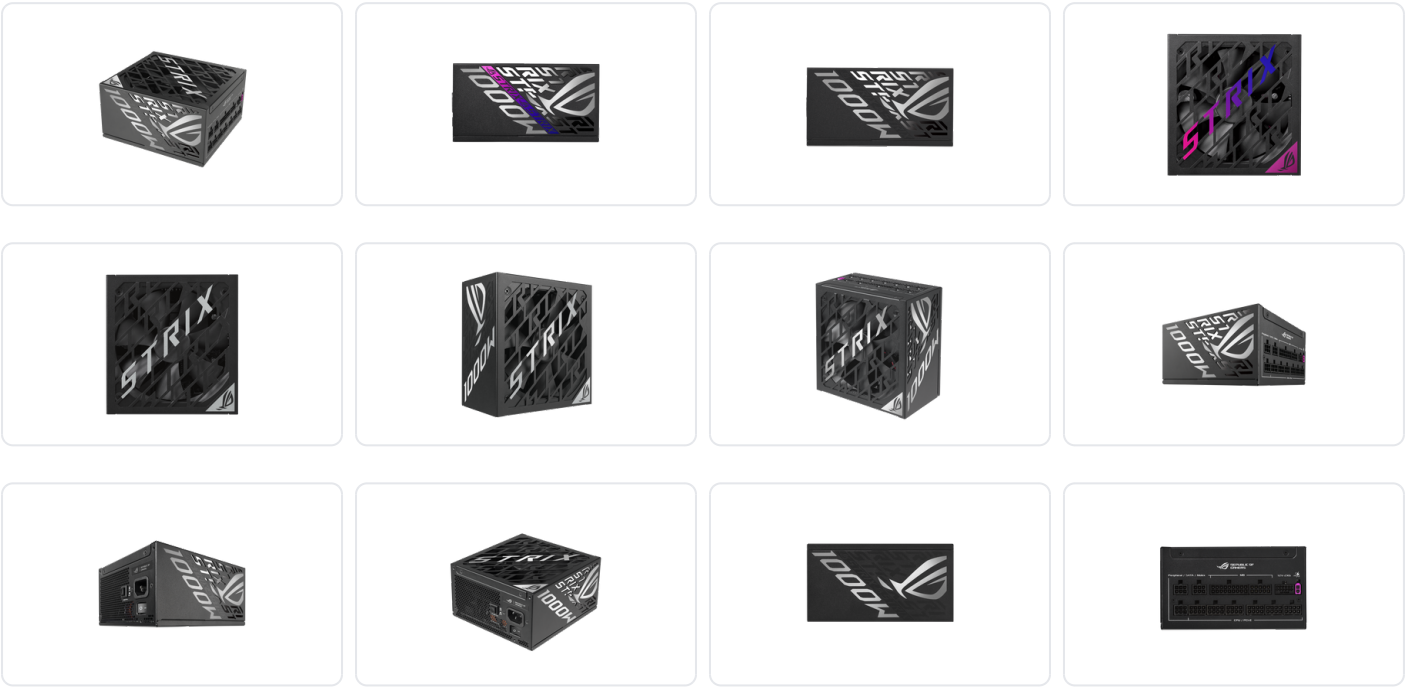

Aprašymas

Superior Stability. Next-Level Efficiency

The ROG Strix Platinum PSU delivers the top-tier performance and unwavering stability demanded by gamers. Featuring next-gen GaN MOSFET for superior power efficiency. The “GPU-FIRST” voltage sensing with patented-intelligent voltage stabilizer ensures a steady flow of power to the graphics card. Plus, it is ready for latest hardwares with ATX 3.1 compliance and a native 12V-2x6 connector. The ROG Strix Platinum Series ensures your high-end rig has the power to conquer any challenge.

ENGINEERING

GaN MOSFET

The ROG Strix Platinum PSU boasts innovative GaN MOSFET that delivers superior power efficiency by up to 30%, resulting in lower energy waste. Plus, the smaller size of GaN MOSFET allows for a more organized internal layout within the PSU. This optimized design provides space for larger heatsinks and enhanced airflow, improving heat dissipation within the PSU.

"GPU-FIRST" Voltage Sensing
with patented-intelligent voltage stabilizer
Activate the "GPU-FIRST" voltage sensing by connecting the IVS cable. This innovative feature enhances voltage stability by up to 45%, even during demanding gaming sessions and overclocking scenarios. If you prefer conventional CPU-focused voltage sensing, just simply disconnect the IVS cable. With this advanced technology, you can experience smooth and consistent gameplay.

High-performance Copper Pins

Upgraded PCIe® connectors featuring superior thermal conductivity ensure cooler operation and improved power delivery efficiency.
This translates to a significant 29% reduction in connector temperatures (up to 12.28°C), promoting optimal performance and stability for even the most demanding graphics cards.

ATX 3.1 Compatible

ATX 3.1 ushers in tighter voltage and current regulation standard for next-gen hardware - and ROG Strix Platinum steps ahead of the curve by being fully compliant. A 16-pin PCIe cable ripe for piping up to 600W of power to PCIe Gen 5.0 graphics cards is bundled with the PSU, readying your build for the next-gen.

80 PLUS Platinum Certification

The ROG Strix 1000W Platinum utilizes low-ESR Japanese capacitors to ensure efficient operation. These upgrades enable an 80 PLUS Platinum certification, which guarantees 89% efficiency at 100% load and 92% efficiency at 50% load. The increased efficiency results in less heat, reduces fan noise, and increases reliability.

Cybenetics Lambda A+ Certification
Quietly deviant
On average, ROG Strix 1000W Platinum PSU emits less than 20 dB of noise – earning a coveted Cybenetics Lambda A+ certification.

COOLING

ROG Heatsinks
Cool under pressure
ROG heatsinks facilitate lower temperatures, longer component lifespan, and extended 0dB operation.

Dual Ball Fan Bearings
2x longer lifespan
Dual ball bearings boast a remarkable lifespan of 80,000 hours, lasting twice as long as sleeve bearings and exceeding even fluid dynamic bearings.

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Ensuring long-lasting, reliable cooling with minimal noise for ROG STRIX Platinum series.

0dB Technology
Quiet intelligence
To reduce noise output, the PWM-controlled fan shuts off entirely when the PSU load is 40% or below.
In 0dB mode (button pressed), the fan continues to spin when transitioning from high to low loads, ensuring safe temperatures are reached before stopping.

EXPERIENCE

Etched Cables

Made from a pliable premium material, these etched cables are easily flexible during installation, and they operate at temperatures 50°C lower than the safety limit when routed for cable management. These cables also meet the rigorous standards of the UL1581 flame test and UL758 certification, helping to ensure a smooth PC DIY experience and exceptional safety.

DIY-friendly CPU Power Connector

Engineered with a distinct clip between the 4+4 pin connectors and a unique color scheme, this CPU power cable simplifies cable identification during installation. The integrated clip helps to ensure a secure and effortless connection to the motherboard's CPU power connector, streamlining the build process and instilling confidence in your PC setup.

Cosmetic Customization

Customize your own PSU with included stickers that complement the PSU's patterns. Choose your preferred color scheme for a personalized touch.

10-year Warranty
A decade of power
We're so confident about the reliability of the ROG Strix 1000W Platinum that we back it with a 10-year warranty.

Techninė specifikacija

Energijos valdymas	
Bendroji galia	1000 W
AC įėjimo įtampa	100 - 240 V
Galios koeficiento pataisos (PFC) tipas	Aktyvus
Kompleksinė galia (+3,3 V)	130 W
Kompleksinė galia (+12 V)	1000 W
Kompleksinė galia (+5V)	130 W
Kompleksinė galia (–12 V)	3,6 W
Kompleksinė galia (+5 VSB)	15 W
Didžiausia išėjimo įtampa (+3,3 V)	25 A
Didžiausia išėjimo įtampa (+12 V)	83,3 A
Didžiausia išėjimo įtampa (+5 V)	25 A
Didžiausia išėjimo įtampa (–12 V)	0,3 A
Didžiausia išėjimo įtampa (+12 VSB)	3 A

Maitinimo apsaugos ypatybės	Viršijus nuolatinę srovę, Viršijus galią, Apsauga nuo per didelės įtampos, Apsauga nuo perkaitimo, Trumpasis jungimas, Minimaliosios įtampos apsauga
Ryšys	
Motininės plokštės maitinimo jungtis	20+4 pin ATX
Periferinė (Molex) galios jungtis (4-pin)	3
Motininės plokštės maitinimo kabelio ilgis	61 cm
SATA elektros jungčių skaičius	6
SATA maitinimo kabelio ilgis	120,400 mm
Periferinio („Molex“) maitinimo kabelio ilgis	150,400 mm
PCI „Express“ maitinimo jungtys (6 + 2 kontaktai)	4
„PCI Express“ maitinimo jungtys (16 kontaktų)	1
PCI „Express“ galia kabelio ilgis	75 cm
CPU maitinimo jungtis (4 + 4 kaisčiai)	Taip
CPU maitinimo laido ilgis	100 cm
ATX maitinimo jungtis (20 + 4 kaisčiai)	Taip
Perdavimo laidu tipas	Visiškai modulinis
PCI „Express“ jungtis	Taip
Veikimo charakteristikos	
Paskirtis	PC
Maitinimo bloko (PSU) formos koeficientas	ATX
Sertifikatas 80 PLUS	80 PLUS Platinum
Garso lygis	20 dB
Aušinimo padengimo tipas	Rutulinis guolis
Vidutinis laikas tarp trikčių (MTBF)	120000 h
ATX versija	3.1
Konstrukcija	
Produkto spalva	Juoda, Sidabras
Aušinimo tipas	Semi-passive
Ventiliatorių skaičius	1 ventiliatorius(iai / ių)
Iliuminacija	Taip
On/off mygtukas	Taip
Pakuotės turinys	
Pridėti kabeliai	AC, CPU, PCIe, Peripheral (Molex), SATA
Sertifikatai	
Sertifikavimas	Cybenetics Noise Level Certification A+

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Svoris ir matmenys	
Plotis	160 mm
Ilgis	150 mm
Aukštis	86 mm
Svoris	2,91 kg
Pakuotės duomenys	
Pakuotės plotis	320 mm
Pakuotės gylis	200 mm
Pakuotės aukštis	108 mm
Paketo svoris	3,62 kg
Pakuotės tipas	„Box“
Matmenys ir svoris	
Matmenys (I × P × A)	11,00cm × 33,00cm × 20,00cm

Dokumentai ir vaizdo įrašai

› Naudojimo instrukcija

Gamintojo ir saugos informacija

GAMINTOJAS

ASUSTeK Computer Inc
Li-Te Road 15, 112 Taipei, TW
asus.com

ATSAKINGAS ASMUO ES

ASUS France S.A.R.L.
Allee bienvenue 10, 93160 Paris, FR
channel.asus.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.