
ACT Green 0.25 meters LSZH S/FTP CAT6A slimline patch cable snagless with RJ45 connectors

Gamintojas: **ACT** · Modelis: **DB7752** · EAN: **8716065601886** · Prekės kodas: **983491**

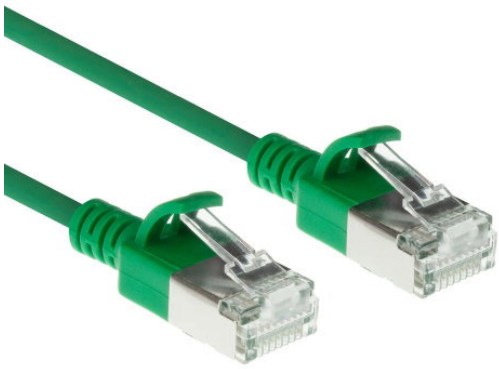

10.90€

Kaina su PVM

Be PVM: **9.01€**


In Stock

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Cable length: 0.25 meters
- ✓ CAT6A S/FTP slimline snagless patch cable with a max. bandwidth of 500MHz (10Gbit)
- ✓ Full copper 30AWG wires, 50µ gold-plated RJ-45 contacts
- ✓ Outer diameter jacket of only 4.5mm for better cable management and less volume, for improved airflow
- ✓ Low Smoke Zero Halogen (LSZH) cable jacket reduces the risk of high concentrations of toxic gases in case of cable damage due to fire or short circuit
- ✓ Specifications comply to international standards
- ✓ Cables are 100% tested
- ✓ Colour: green
















Aprašymas

The ACT S/FTP CAT6A datacenter slimline patch cables ensure a max. bandwidth of 500MHz (10Gbit). The patch cables have full copper 30 AWG wires and 50u gold-plated RJ45 contacts. All cables comply with international standards and are 100% tested.

CAT6A S/FTP slimline datacenter ethernet cables are smaller in diameter (4.5mm vs 5.9mm) than regular CAT6A patch cords.

The cables have a smaller bending radius in comparison with regular patch cords. This results in a better airflow in the server rack/network cabinet.

The application of a LSZH (Low Smoke Zero Halogen) cable jacket reduces the risk of high concentrations of toxic gases in case the cable is damaged due to fire or short circuit.

Although, ISO/IEC and TIA standards describe the use of patch cords between 22 and 28 AWG, it is possible to use 30 AWG patch cables. This results in a higher attenuation, particularly at higher frequencies.

Techninė specifikacija

Features	
Cable length	0.25 m
Cable standard	Cat6a
Cable shielding	S/FTP (S-STP)
Connector 1	RJ-45
Connector 2	RJ-45
Product colour	Green
Connector 1 gender	Male
Connector 2 gender	Male
Cable shape	Round
Connector 1 form factor	Straight
Connector 2 form factor	Straight
Connector contacts plating	Gold
Connector shielding	Yes
Jacket material	Low smoke zero halogen (LSZH)
Conductor material	Copper
Ethernet interface type	10 Gigabit Ethernet
Networking standards	IEEE 802.3at
AWG wire size	30
Data transfer rate	10000 Mbit/s
Frequency	500 MHz
Bend radius (min)	2.7 cm
Power over Ethernet (PoE)	Yes

Power over Ethernet (PoE) type supported	PoE+
Total Power over Ethernet (PoE) budget	30 W
Snagless cable boot	Yes
Operational conditions	
Operating temperature (T-T)	-20 - 60 °C
Sustainability	
Doesn't contain	Halogen
Certificates	
Compliance certificates	CE
Weight & dimensions	
Outer diameter	4.5 mm
Packaging content	
Quantity per pack	1 pc(s)

Gamintojo ir saugos informacija

MANUFACTURER

Intronics BV
Koolhovenstraat 1E, 3772 MT Barneveld, NL
intronics.nl

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt