
LogiLink C6A047S networking cable Yellow 1.5 m Cat6a S/FTP (S-STP) Round

Gamintojas: **LOGILINK** · Modelis: **C6A047S** · EAN: **4052792056389** · Prekės kodas: **996011**

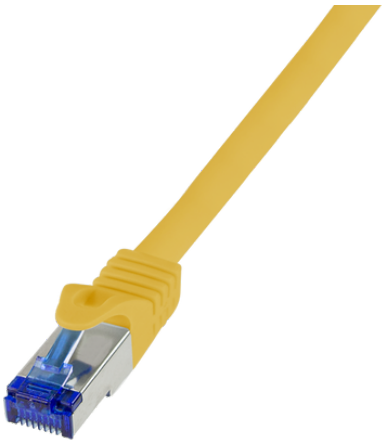

7.90€

Kaina su PVM

Be PVM: **6.53€**

In Stock

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Cat.6A RJ45 shielded plugs with Cat.7 S/FTP raw cable
- ✓ Flexible and soft cable with small bending radius
- ✓ Suitable for 10 Gigabit Ethernet, PoE, PoE+, PoE++
- ✓ Comply with Cat.6A ISO11801 Channel Class EA
- ✓ GHMT tested and certified
- ✓ 4x2x26/7 AWG bare copper wire
- ✓ Low smoke (IEC 61034)
- ✓ Halogen free (IEC 60754-2)
- ✓ Color: yellow, similar to RAL 1018







Aprašymas

Patch cable Ultraflex, Cat.6A, S/FTP, yellow, 1.5 m" from LogiLink Professional

The certified LogiLink Cat.6A patch cable is ideal for data transfers up to 10 Gigabit Ethernet and transfer frequencies up to 500 MHz. The jacket is halogen-free and flame retardant, the copper wires are shielded in pairs, the overall shield is made of copper braid. The shielded RJ45 plugs come with an overmoulded slim strain relief and snagless design.

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Techninė specifikacija

Features	
Cable length	1.5 m
Cable standard	Cat6a
Cable shielding	S/FTP (S-STP)
Connector 1	RJ-45
Connector 2	RJ-45
Product colour	Yellow
Connector 1 gender	Male
Connector 2 gender	Male
Cable shape	Round
Connector shielding	Yes
Connector shield material	Copper alloy
Jacket material	Low smoke zero halogen (LSZH)
Conductor material	Copper
Cable class	Ea
Cabling technology	10GBase-T
Ethernet interface type	10 Gigabit Ethernet
AWG wire size	26/7
Frequency	500 MHz
Fire-resistant	Yes
Molded cable boot	Yes
Snagless cable boot	Yes
Plug and Play	Yes
Operational conditions	
Operating temperature (T-T)	-20 - 75 °C
Sustainability	
Doesn't contain	Halogen
Certificates	
Compliance certificates	CE, RoHS
Certification	ISO11801 Channel Class EA EN50173 & ANSI/TIA 568C.2 IEC 61034 IEC 60754-2 IEC 60332-1-2
Packaging content	
Quantity per pack	1 pc(s)

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Technical details	
Sustainability compliance	Yes

Dokumentai ir vaizdo įrašai

› Product leaflet

Gamintojo ir saugos informacija

MANUFACTURER

2direct GmbH
Langenstück 5, 58579 Schalksmühle, DE
info@2direct.de
2direct.de

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt