


Cudy FS108 network switch Unmanaged Fast Ethernet (10/100) Black

Gamintojas: **CUDY** · Modelis: **FS108** · EAN: **6971690793418** · Prekės kodas: **750953**

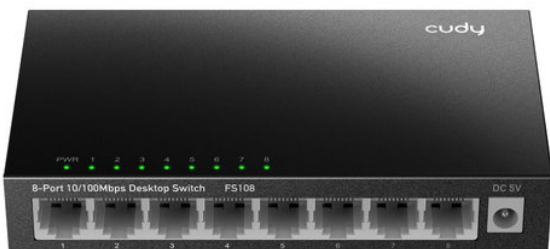

17,90 €

Kaina su PVM

Be PVM: **14,79 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 8× Fast Ethernet Ports
- ✓ Max 1W, Idle 0.25W
- ✓ 86.5×53×23 mm (3.41×2.09×0.91")
- ✓ Desktop, Wall-Mount
- ✓ Metal Casing
- ✓ 201 g (7.09 oz.)



Aprašymas

A 8-FE switch with meta casing ideal for wired network expansion in home and office environments.

Reliable Transmitting

A packet buffer prevents packet loss and improves the reliability of your network.

Compact Design

Place it in a telecommunications box or cable box without assigning extra space.

Power-Efficient Chipset

Super power-efficient with 1W maximum and 0.25W standby power consumptions.

Wall Mounting

Provides two mounting holes on the bottom of the casing, catering to the wall-mounting scenario.

Techninė specifikacija

Specifications	
Sandėlio grupė	> Netzwerk > Switches [+1607][-273]
Management features	
Switch type	Unmanaged
Ports & interfaces	
Basic switching RJ-45 Ethernet ports quantity	8
Basic switching RJ-45 Ethernet ports type	Fast Ethernet (10/100)
Installed SFP modules quantity	0
Installed SFP+ modules quantity	0
Network	
Networking standards	IEEE 802.3i, IEEE 802.3u
10G support	No
Copper ethernet cabling technology	10BASE-T, 100BASE-TX
Cable types supported	Cat3, Cat5
Auto MDI/MDI-X	Yes
Ethernet LAN data rates	10,100 Mbit/s
Auto-negotiation	Yes
Data transmission	
MAC address table	512 entries
Switching capacity	1.6 Gbit/s
Forwarding rate	1.1904 Mpps
Store-and-forward	Yes
Packet buffer memory	0.448 MB
Design	
Product colour	Black
Housing material	Metal
LED indicators	Yes
Power	
Power source	DC
Power supply included	Yes

DC input voltage	5 V
Input current	0.55 A
Power consumption (max)	1 W
Power over Ethernet (PoE)	
Power over Ethernet (PoE)	No
Other features	
Warranty period	1 year(s)
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 75 °C
Operating relative humidity (H-H)	0 - 100%
Storage relative humidity (H-H)	5 - 95%
Weight & dimensions	
Width	138 mm
Depth	78 mm
Height	25 mm
Weight	200 g
Packaging data	
Package type	Box
Package width	151 mm
Package depth	90.5 mm
Package height	63 mm
Package weight	323 g
Logistics data	
Country of origin	China
Matmenys ir svoris	
Svoris	0,33kg