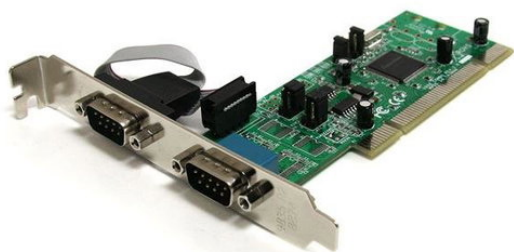


StarTech.com 2 Port PCI RS422/485 Serial Adapter Card with 161050 UART - TAA

 Gamintojas: **STARTECH** · Modelis: **PCI2S4851050** · EAN: **065030842587** · Prekės kodas: **954564**


25,89 €

Kaina su PVM

 Be PVM: **21,40 €**

Sandėlyje


Prekė internetu

 Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Supports maximum data transmission rate of 128Kbps
- ✓ 16C1050 UART with 256-byte Deep FIFO
- ✓ Supports 2-wire and 4-wire RS485 modes
- ✓ Jumper pins for RS422/485 toggling
- ✓ Supports Hardware and Software flow control
- ✓ Supports PCI Power Management 1.1
- ✓ Compliant with PCI Local Bus Specification 2.3



Aprašymas

Add two RS422/485 serial ports through a standard or low profile PCI expansion slot

The PCI2S4851050 2-Port PCI Serial Adapter Card (RS422/RS485) with 161050 UART adds two DB9 RS422/RS485 serial ports, using a single PCI expansion slot.

The PCI serial card offers a high performance 16C1050 UART and supports both 2-wire and 4-wire RS485 modes. The card delivers an efficient single-chip design and a large 256-byte transit/receive FIFO buffer that work together to provide high-speed serial communication while reducing the overall load on the system CPU.

With the included standard and low profile/half-height brackets, this PCI serial expansion card suits a broad range of system form factors, and is a perfect addition for connecting RS422/485 serial devices to a host computer. For added versatility, the RS422/RS485 adapter is able to accommodate 3.3 or 5V PCI/PCI-X slots.

Backed by a StarTech.com lifetime warranty and free lifetime technical support.

Techninė specifikacija

Ports & interfaces	
Host interface	PCI/PCI-X
Output interface	Serial
Serial ports quantity	2
Serial interface type	RS-422, RS-485
Design	
Internal	Yes
Certification	CE, FCC
Features	
Chipset	SystemBase -SB16C1052PCI
Baud rate	128 Kbit/s
FIFO (First In, First Out)	256 B
Data bits	5, 6, 7, 8
Stop bits	1, 1.5, 2
Flow control support	Yes
Operational conditions	
Operating temperature (T-T)	-10 - 80 °C
Storage temperature (T-T)	-20 - 100 °C
Operating relative humidity (H-H)	5 - 85%
System requirements	
Windows operating systems supported	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64
Server operating systems supported	Windows 2000 Server, Windows Server 2003, Windows Server 2008 R2, Windows Server 2012
Technical details	

Compliance certificates	RoHS
Weight & dimensions	
Width	15 mm
Depth	120 mm
Height	45 mm
Weight	58 g
Packaging data	
Drivers included	Yes
Manual	Yes
Package width	144 mm
Package depth	176 mm
Package height	33 mm
Package weight	152 g
Logistics data	
Harmonized System (HS) code	84733020
Products per master (outer) case	75 pc(s)
Master (outer) case width	352 mm
Master (outer) case length	684 mm
Master (outer) case height	316 mm
Other features	
Data transfer rate	0.128 Mbit/s
Compatible operating systems	Windows 7 (32/64bit)/ Vista(32/64)/ XP(32/64), Windows Server 2008 R2/ 2003(32/64)/ 2000, Linux 2.4.x/ 2.6.x
Matmenys ir svoris	
Matmenys (I × P × A)	18,00cm × 15,00cm × 3,00cm
Svoris	0,15kg

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

StarTech.com Ltd.

Artisans Crescent 45, N5V 5E9 Ontario, London,
CA

startech.com

ATSAKINGAS ASMUO ES

StarTech.com Limited

Laarderhoogtweg 25, 1101 EB Amsterdam, NL
startech.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt